

5. Outdoor public spaces


5.5.2 Picnic tables

Location:


Date and time:

Auditor:

Description:

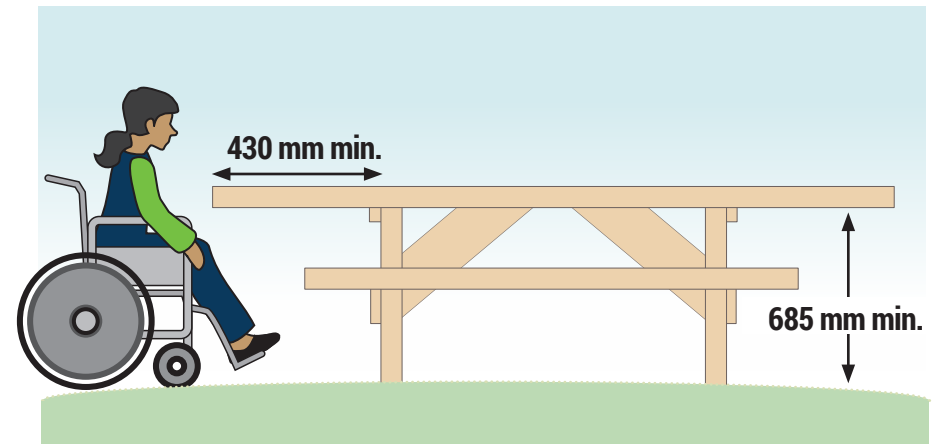

Accessible picnic tables should provide knee and toe clearance at least 800 mm wide (not shown), 430 mm deep, and 685 mm high (5.5.2.c).

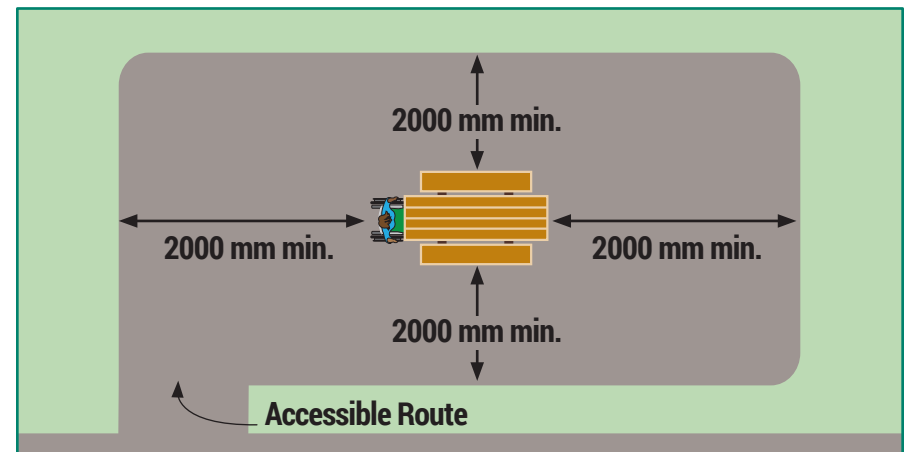

An accessible picnic table with a clear space of 2000 mm minimum on all sides of the table (5.5.2.d) and an accessible route to and from the picnic table (5.5.2.e)

	Source	Yes (+ 3)	Most of the time (+ 2)	Some -times (+ 1)	No (0)	N/A (- 3)*	Comments
5.5.2.a If there are two or fewer picnic tables, are all tables accessible?	RHFAC (8.17.1)						
5.5.2.b If there are more than two picnic tables, are the majority of tables accessible?	RHFAC (8.17.1)						
5.5.2.c Do accessible picnic tables provide suitable knee and toe clearances of at least 800 mm wide x 430 mm deep x 685 mm high (31in. x 17in. x 27in.)?	CSA B651-18 (8.6.3.2.b)						
5.5.2.d Is there at least 2000 mm (79 in.) of clear space on all sides of the table?	CSA B651-18 (8.6.3.2.b)						
5.5.2.e Is there a clear accessible path up to the table?	CSA B651-18 (6.7.2.a)						
5.5.2.f Is the ground surface under the tables firm, stable, and level?	CSA B651-18 (6.7.2.b)						
						Subtotal	Max. score
						+	18
							=
		Subtotal	Subtotal	Subtotal	Subtotal	Final Total	
		+	+	+	=		

Principle 1

Does this feature follow the whole journey approach?

Principle 2

Does this feature follow the concepts of universal design?

Principle 3

Is there an adequate seasonal maintenance program for this feature?
