

N.S. Regulations 241/2026
FILED
Date October 6, 2026
RACHEL L. JONES
REGISTRAR OF REGULATIONS

**In the matter of Section 81 of Chapter 20 of the Acts of 2025,
the *Traffic Safety Act***

-and-

**In the matter of new regulations respecting traffic control devices
made by the Minister of Public Works**

Order

I, Fred Tilley, Minister of Public Works for the Province of Nova Scotia, pursuant to Section 81 of Chapter 20 of the Acts of 2025, the *Traffic Safety Act*, hereby make new regulations respecting traffic control devices in the form set forth in the attached Schedule "A".

This order is effective on and after the date that Chapter 20 of the Acts of 2025, the *Traffic Safety Act*, comes into force.

Dated and made September 8, 2026, at Halifax Regional Municipality, Province of Nova Scotia.


Honourable Fred Tilley
Minister of Public Works

Schedule “A”

Regulations Respecting Traffic Control Devices made by the Minister of Public Works under Section 81 of Chapter 20 of the Acts of 2025, the *Traffic Safety Act*

Interpretation

1 Citation

These regulations may be cited as the *Traffic Control Devices Regulations*.

2 Definitions

In these regulations,

“Act” means the *Traffic Safety Act*;

“active transportation facility” means infrastructure that is specifically designed to support walking, cycling or other non-motorized modes of transportation;

“automatic flagger assisted device” means a self-contained, portable traffic signal light used by a traffic control person to control alternating traffic at a temporary workplace;

“cycling facility” means an active transportation facility that is specifically designed to support cycling;

“fire vehicle entrance signal” means a traffic signal light installed to assist fire vehicles in obtaining the right-of-way to gain access to a public road;

“guide and information sign” means a traffic sign that is not an official traffic sign and that provides information for

- (i) route selection,
- (ii) locating off-road facilities, or
- (iii) identifying geographical features or points of interest;

“*Motor Vehicle Safety Regulations*” means the *Motor Vehicle Safety Regulations* made under the *Motor Vehicle Safety Act* (Canada);

“National Manual” means *Manual of Uniform Traffic Control Devices for Canada*, Fifth Edition, January 2014, published by the Transportation Association of Canada, as amended;

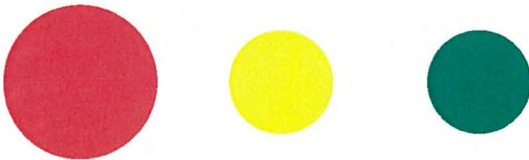
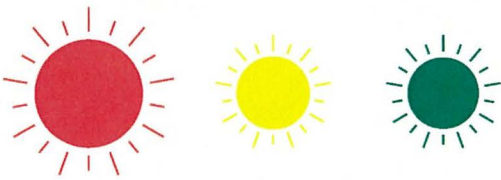
“Nova Scotia Temporary Workplace Traffic Control Manual” means the latest edition of the *Nova Scotia Temporary Workplace Traffic Control Manual* published by the Minister;

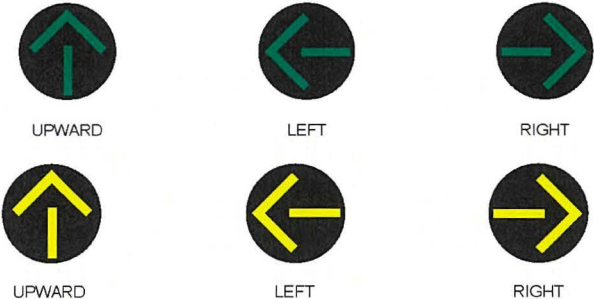
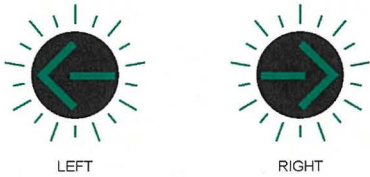
“warning sign” means a traffic sign that is not an official traffic sign and that advises or provides an advance indication of conditions on or adjacent to a highway that are potentially hazardous to traffic on the highway.

Official Traffic Signals

3 Official traffic signals designation and specifications

- (1) The official traffic signals are as set out in the following table and an official traffic signal must comply with the specifications set out in the table for the sign:

Table of Official Traffic Signals	
Depiction	Specifications
 RED AMBER GREEN	steady ball signal - round signal in 1 of the following colours: - green - amber - red
 RED AMBER GREEN	flashing ball signal - round flashing signal in 1 of the following colours: - green (subject to the time limitations in subsection 5(2) and clause 5(3)(a)) - amber - red

 UPWARD LEFT RIGHT UPWARD LEFT RIGHT	steady arrow signal • round, black background • arrow pointing upward, left or right, in 1 of the following colours: – green – amber
 LEFT RIGHT	flashing green arrow signal • round, black background • flashing green arrow pointing left or right
 UPWARD LEFT RIGHT	transit priority signal • round, black background • steady white rectangle angled upward, left or right
 STEADY DOWN STEADY X FLASHING X	lane control signal • rectangular, black background with 1 of the following: – steady downward-pointing green arrow, – steady red “X”, – flashing red “X”
	pedestrian walk signal • rectangular, black background • 1 of the following: – steady signal of either white figure of person walking or white outline of person walking – subject to the time limitation in clause 5(3)(b), steady signal consisting of word “WALK” in all capital white letters

	pedestrian don't walk signal (steady) • rectangular, black background • 1 of the following: – steady hand signal consisting of orange hand symbol or orange outline of hand – subject to the time limitation in clause 5(3)(b), steady signal consisting of words “DON’T WALK” in all capital orange letters
	pedestrian don't walk signal (flashing) • rectangular black background • 1 of the following: – flashing hand signal consisting of orange hand symbol or orange outline of hand – subject to the time limitation in clause 5(3)(b), flashing signal consisting of words “DON’T WALK” in all capital orange letters
	steady bicycle signal • round, black background • symbol of bicycle in 1 of the following colours: – red – amber – green

- (2) An official traffic signal must meet the applicable size requirement in Section 4.
- (3) An official traffic signal must be illuminated so that it is clearly distinguishable under normal conditions of visibility.
- (4) A temporary workplace signer may place an official traffic signal on a highway as part of an automatic flagger assisted device erected in accordance with the *Nova Scotia Temporary Workplace Traffic Control Manual*.

4 Traffic signal sizes

- (1) Subject to subsections (2) and (3), a circular lens used for a traffic signal in a traffic signal light must have a diameter of at least 200 mm.

- (2) On or after April 1, 2027, a traffic signal light that is installed either as a new or planned replacement traffic signal light must use a circular lens that is at least 300 mm in diameter for each of the following traffic signals:
 - (a) a steady green arrow;
 - (b) a flashing green arrow;
 - (c) a steady amber arrow;
 - (d) a steady red ball;
 - (e) a flashing red ball.
- (3) A traffic signal displayed on an automatic flagger assisted device must use a circular lens that is at least 300 mm in diameter.
- (4) On or after April 1, 2027, a traffic signal light that is installed either as a new or planned replacement traffic signal light and that includes a red ball traffic signal and a green arrow traffic signal must use a circular lens that is at least 300 mm in diameter for each of the traffic signals in the device.
- (5) On or after April 1, 2027, a traffic signal light that is installed either as a new or planned replacement traffic signal light must use a lens that is at least 300 mm by 300 mm in size for each of the following traffic signals:
 - (a) a lane control signal;
 - (b) a pedestrian signal.

5 Traffic signal lights

- (1) A traffic signal light must display 1 or a combination of official traffic signals.
- (2) On or after April 1, 2029, a traffic signal light must not be altered to display a flashing green ball traffic signal.
- (3) On or after April 1, 2029, a traffic signal light that is installed either as a new or planned replacement traffic signal light must not display any of the following traffic signals:
 - (a) a flashing green ball traffic signal;
 - (b) a pedestrian signal that is 1 of the following:
 - (i) a walk signal consisting of the word “WALK” in white all capital letters on a black background,
 - (ii) a flashing don’t walk signal consisting of the words “DON’T WALK” in all capital orange letters on a black background,

- (iii) a steady don't walk signal consisting of the words "DON'T WALK" in all capital orange letters on a black background.

6 Mandatory traffic signal display combinations

- (1) Except as provided in subsections (2) and (3), a traffic signal light that displays a steady red ball traffic signal must include both of the following:
 - (a) a steady amber ball or steady amber arrow traffic signal that is displayed before the steady red ball traffic signal is displayed;
 - (b) a green ball or green arrow traffic signal that is displayed before the amber ball or arrow traffic signal is displayed.
- (2) An automatic flagger assisted device must include all of the following:
 - (a) a steady red ball traffic signal;
 - (b) a steady amber ball traffic signal that is displayed before the steady red ball traffic signal is displayed;
 - (c) a flashing amber ball that is displayed before the steady amber ball traffic signal is displayed.
- (3) A fire vehicle entrance signal must include all of the following:
 - (a) a flashing red ball traffic signal;
 - (b) a steady amber ball traffic signal that is displayed before the flashing red ball traffic signal is displayed;
 - (c) a flashing amber ball that is displayed before the steady amber ball traffic signal is displayed.

Traffic Signs Other than Official Traffic Signs

7 Warning signs

A warning sign erected or placed on or near a highway must meet 1 of following requirements:

- (a) it must conform to the colour, depiction and dimensions indicated for it in the National Manual, to the extent that the National Manual is not inconsistent with the Act and these regulations;
- (b) if it is not depicted in the National Manual, it must be approved by the Provincial Traffic Authority.

8 Guide and information signs

A guide sign or an information sign erected or placed on or near a highway must meet both of the following requirements:

- (a) it must conform to the shape and colour indicated for guide signs and information signs in the National Manual, to the extent that the National Manual is not inconsistent with the Act and these regulations;
- (b) it must not be erected in a manner that interferes with a warning sign, an official traffic sign or an official traffic signal.

9 Crossing guard stop paddle

A stop paddle required by subsection 34(2) of the Act to be displayed by a crossing guard must meet all of the following criteria:

- (a) it must have an octagonal shape and be at least 30 cm by 30 cm, not including the handle;
- (b) it must have the word “STOP” displayed on the paddle in white letters on a red background;
- (c) the lettering on the paddle must be at least 10 cm in height;
- (d) other than the handle, it must be made of retro-reflective material.

Designation of Temporary Work Areas

10 Traffic signs for designating temporary work area

All of the following traffic signs, as described and depicted in the *Nova Scotia Temporary Workplace Traffic Control Manual*, are designated for use in identifying a temporary work area:

- (a) at the beginning of a temporary work area, the following applicable sign:
 - (i) for a temporary work area where road work is taking place, a TC-2 “Road Work” sign,
 - (ii) for a temporary work area where utility operations are taking place, a TC-114(NS) “Overhead Bucket Work” sign or a TC-2 “Road Work” sign;
- (b) at the end of a temporary work area, a TC-4 “Construction Ends” sign.

Official Traffic Signs

11 Official traffic sign identifier, depiction, description and specifications

(1) In the following table:

“all-terrain vehicle” means the following:

- (a) in the description for all of the following signs, an all-terrain vehicle as defined in the *Motor Vehicle Safety Regulations*:
 - (i) the RB-87 “all-terrain vehicles prohibited” sign,
 - (ii) the RB-88 “automobiles prohibited” sign,
 - (iii) the RB-89 “automobiles and motorcycles prohibited” sign,
 - (iv) the R-204 “all-terrain vehicle route” sign, if placed to regulate traffic at a location other than on a highway.
- (b) in the description for the R-204 “all-terrain vehicle route” sign, if placed to regulate traffic on a highway, an all-terrain vehicle as defined in the *Road Trails Act*.

“dirt bike” means a two-wheeled motor vehicle designed exclusively for off-highway use.

(2) Subject to subsection (3) and Sections 12 to 14, the identifier, depiction, description and specifications of the official traffic signs are as set out in the following table:

Table of Official Traffic Signs		
Identifier, Depiction and Dimensions	Border Colour	Specifications
 RA-1 60 x 60 cm	white	stop sign • block capital white letters on red background • lettering is at least 20 cm in height • used to indicate to drivers facing the sign that they must come to a complete stop

 RA-1B 60 x 60 cm	white	Bilingual stop sign • block capital white letters on red background • must contain only the words STOP and ARRÊT • must have the word STOP above the word ARRÊT
   RA-1S1 30 x 30 cm RA-1S2 30 x 30 cm RA-1S3 30 x 30 cm	white	pictographic all way stop tab sign • red background • red octagons imposed on white symbol of intersection • configuration of intersection shown on sign must generally match physical configuration of intersection where sign erected • used only in combination with and displayed under stop sign (RA-1) • not to be used in combination with – 4-way tab sign (RA-1S4) – all way tab sign (RA-1S5)
 RA-1S4 30 x 15 cm	white	4-way tab sign • block capital white letters on red background • used only in combination with and displayed under stop sign (RA-1) • not to be used in combination with – pictographic all way stop tab sign (RA-1S1, RA-1S2, RA-1S3) – all way tab sign (RA-1S5)
 RA-1S5 40 x 15 cm	white	all way tab sign • block capital white letters on red background • used only in combination with and displayed under stop sign (RA-1) • not to be used in combination with: – pictographic all way stop tab sign (RA-1S1, RA-1S2, or RA-1S3) or – 4-way tab sign (RA-1S4)

 RA-2 75 cm sides	white	yield sign • red inverted triangle with white centre • used to indicate to drivers approaching the sign that they must yield to conflicting traffic
 RA-3L 60 x 75 cm  RA-3R 60 x 75 cm	black	school crosswalk sign • black symbol of walking schoolboy and schoolgirl on white background • oriented so that symbol shows pedestrians walking toward centre of roadway • used to indicate to drivers that they are at a marked school crosswalk
 RA-4L 60 x 75 cm  RA-4R 60 x 75 cm	black	pedestrian crosswalk sign • black symbol of pedestrian on white background • oriented so that symbol shows pedestrian walking toward centre of roadway • used to indicate to drivers that they are at a marked crosswalk
 RA-5L 60 x 75 cm  RA-5R 60 x 75 cm	white	overhead pedestrian crosswalk sign • white symbol of pedestrian on black background • internally illuminated • mounted above crosswalk and oriented so that symbol shows pedestrian walking toward centre of roadway • used to indicate to drivers that they are at a marked crosswalk


 RA-8 30 x 75 cm	black and fluoresce nt yellow- green	in-street school crosswalk sign • white background • red inverted triangle with white centre above word “TO” in block capital letters above black symbol of walking schoolboy and schoolgirl • surrounded by narrow black border • All surrounded by a wide fluorescent yellow-green border • Used to temporarily mark a school crosswalk
 RB-1 60x75 cm	black	maximum speed sign • block capital black letters and black numerals on white background • numerals on sign indicate maximum rate of speed in kilometres per hour for section of highway where sign is erected
 RB-2 60x75 cm	black	trucks maximum speed sign • block capital black letters and black numerals on white background • numerals on sign indicate maximum rate of speed in kilometres per hour for trucks for section of highway where sign is erected
 RB-3 60x45 cm	white	night speed sign • block capital white letters and white numerals on black background • numerals on sign indicate maximum rate of speed in kilometres per hour for section of highway at night where sign is erected


 RB-4 60x75 cm	black	minimum speed sign • block capital black letters and black numerals on white background • numerals on sign indicate minimum rate of speed in kilometres per hour for section of highway where sign is erected
 RB-5 60 x 75 cm	black	maximum speed ahead sign • black arrow and black numerals on white background • placed only in advance of the first maximum speed sign (RB-1) in a particular speed zone • numerals on sign indicate maximum rate of speed in kilometres per hour for upcoming speed zone in advance of which sign is displayed
 RB-9S 60 x 30 cm	black	except bicycles tab sign • block capital black letters on white background • used only in combination with and displayed under the following signs to indicate that approaching cyclists are not required to comply with sign under which tab sign is displayed: – through traffic prohibited sign (RB-10) – prohibitive turn control sign (RB-11L, RB-11R or RB-16) – restrictive turn control sign (RB-14L, RB-14R, RB-15 or RB-15A) – do not enter sign (RB-23) – any other regulatory sign that approaching cyclists are not required to comply with


 RB-10 60 x 60 cm	black	through traffic prohibited sign • red circle and diagonal line superimposed over black arrow on white background • used to indicate that traffic approaching sign must not proceed straight ahead • may be supplemented by any of the following signs displayed under it: – except bicycles tab sign (RB-9S) – except buses tab sign (RB-11S1) – except authorized vehicles tab sign (R-107)
   RB-11L 60 x 60 cm RB-11R 60 x 60 cm RB-16 60 x 60 cm	black	prohibitive turn control sign • red circle and diagonal line superimposed over black arrow on white background • used to indicate that traffic approaching sign must not turn in direction shown by black arrow on sign • may be supplemented by and displayed above any of the following signs: – except bicycles tab sign (RB-9S) – except buses tab sign (RB-11S1) – except authorized vehicles tab sign (R-107)

RB-14L 60 x 60 cm RB-14R 60 x 60 cm RB-15 60 x 60 cm RB-15A 60 x 60 cm	black	restrictive turn control sign • green circle circumscribing black arrow or arrows on white background • used to indicate that traffic approaching sign must proceed only in direction or directions shown by black arrow or arrows on sign • may be supplemented by and displayed above any of the following signs: – except bicycles tab sign (RB-9S) – except buses tab sign (RB-11S1) – except authorized vehicles tab sign (R-107)
RB-11S1 60 x 30 cm	black	except buses tab sign • block capital black letters on white background • used only in combination with and displayed under the following signs, to indicate that approaching buses are not required to comply with sign under which tab sign is displayed: – through traffic prohibited sign (RB-10) – prohibitive turn control sign (RB-11L, RB-11R or RB-16) – restrictive turn control sign (RB-14L, RB-14R, RB-15 or RB-15A) – any other regulatory sign that approaching bus is not required to comply with

 RB-17R 60 x 90 cm	black	no right turn on red sign • white background • red circle and diagonal line superimposed over black arrow, above depiction of black traffic signal head showing red display • used to indicate that approaching traffic must not make right turn when red light is displayed • may be supplemented by except with green arrow sign (R-105) as part of sign or displayed as tab under sign
 RB-17L 60 x 90 cm	black	no left turn on red sign • white background • red circle and diagonal line superimposed over black arrow, above depiction of black traffic signal head showing red display • used to indicate that approaching traffic must not make left turn when red light is displayed • may be supplemented by except with green arrow sign (R-105) as part of sign or displayed as tab under sign
 RB-18 60 x 75 cm	black	left turn signal sign • block capital black letters on white background • used only on intersection approach where separate traffic signals are used for left-turning traffic and it is not clear that they are separate from signals for traffic moving through intersection
 RB-21 90 x 30 cm	white	one way sign • white arrow on black background • used to indicate to drivers facing the sign that the road they are entering has one-way traffic in the direction of travel

 RB-23 60 x 60 cm	black	do not enter sign - red circle on white background with thick white horizontal line in centre of circle - used to indicate to drivers facing the sign that they are not permitted to enter the road on which the sign is erected
 RB-24 60 x 75 cm	black	two-way traffic sign - black symbols and black arrows on white background - used to indicate to drivers that the road they are travelling on has traffic travelling in both directions
 RB-25 60 x 75 cm	black	keep right sign - black symbol and black arrow on white background - used to indicate that traffic proceeding beyond sign must travel to right of sign
 RB-31 60 x 60 cm	black	do not pass sign - red circle with red diagonal line superimposed over 2 black symbols of cars on white background - used to indicate to drivers that overtaking other vehicles is not permitted
 RB-32 60 x 60 cm	black	passing permitted sign - green circle circumscribing 2 black symbols of cars on white background - used to indicate to drivers that overtaking of other vehicles is permitted if safe to do so

 RB-33 60 x 60 cm	black	motor vehicle passing prohibited sign • red circle with red diagonal line superimposed over black symbol of car to left of black symbol of bicycle on white background • used to indicate to drivers that passing bicycles is prohibited • must be used in combination with do not pass bicycles tab sign (RB-33S1) at beginning of or within no-passing zone to indicate that motorists must not overtake cyclists within zone • may be used in combination with an ends tab sign (RB-33S2) at end of no-passing zone to indicate end of zone and that passing of cyclists is again permitted
 RB-33S1 60 x 30 cm	black	do not pass bicycles tab sign • block capital black letters on white background • used only in combination with motor vehicle passing prohibited sign (RB-33)
 RB-33S2 60 x 30 cm	black	ends tab sign • block capital black letters on white background • used only in combination with another regulatory sign to indicate end of an area where specific requirement or prohibition applies
 RB-34 60 x 75 cm	black	keep right except to pass sign • block capital black letters on white background • used to indicate to drivers that they must drive in the rightmost lane except when passing another vehicle

 RB-35 60 x 75 cm	black	slower traffic keep right sign • block capital black letters on white background • used to indicate that slower moving traffic must travel in right lane
 RB-36 90 x 150 cm	black	yield centre lane to opposing traffic sign • block capital black letters on white background • used to indicate to drivers that they may pass vehicle travelling in the same direction only when there are no vehicles in the centre lane travelling in the opposite direction
 RB-37 60 x 75 cm	black	turning vehicles yield to bicycles sign • black and red symbols on white background • used where drivers are required to cross area set aside for cyclists and are required to yield to cyclist
 RB-38 60 x 75 cm	black	turning vehicles yield to bicycles and pedestrians sign • block capital black letters and red yield symbol on white background • used where drivers are required to cross or share area used by cyclists and pedestrians and are required to yield to cyclists and pedestrians

 RB-39 60 x 75 cm	black	bicycles yield to pedestrians sign • black and red symbols on white background • used where cyclists are required to cross or share area used by pedestrians and are required to yield to pedestrians
 RB-40 45 x 75 cm	black	bicycles yield at high speed ramp sign • black and red symbols on white background • used where cyclists are required to yield to vehicles before crossing ramp to or from major road and where maximum rate of speed for major road is higher than 70 km/h
RB-41L 60 x 60 cm RB-41R 60 x 60 cm RB-42L 60 x 60 cm RB-42R 60 x 60 cm RB-43 60 x 60 cm RB-44 60 x 60 cm RB-45 60 x 60 cm RB-48 60 x 60 cm	white	overhead lane control sign • white arrow or arrows on black background • mounted above a lane to indicate that traffic in that lane must proceed in direction or directions shown by arrow or arrows • RB-41L, RB-41R, RB-42L, RB-42R, RB-43, RB-44 and RB-45 signs may be side-mounted, if traffic authority determines it is appropriate, to indicate that traffic in lane immediately next to sign must proceed in direction or directions shown by arrow or arrows • RB-48 sign may be side-mounted if traffic authority determines it is appropriate, only if centre lane tab sign (RB-48S) is displayed below it

RB-48S 60 x 30 cm	black	centre lane tab sign • block capital letters on white background • displayed under overhead lane control sign (RB-48) that is side-mounted • may be displayed under an overhead-mounted overhead lane control sign (RB-48)
	white	side-mounted lane control sign • white arrows on black background separated by short white lines • used to indicate that traffic in lane must proceed in direction shown for that lane
RB-51 RB-52 RB-52A 30 x 30 cm 30 x 45 cm 30 x 45 cm	black	no parking sign • red circle with red diagonal line superimposed over black capital letter "P" on white background • may have: – 1 or 2 arrows pointing in direction(s) in which parking is prohibited, and wording in block capital black letters showing where parking is prohibited, such as "on

		pavement”, “next 3 km”, or “within 3 m of pavement” – block capital black letters and black numerals indicating hours of day and days of week during which parking is prohibited – in block capital black letters, wording such as “bus stop”, “taxi stand”, “loading zone”, “except police vehicles” or other wording determined to be necessary by a traffic authority • used to indicate that parking is prohibited in the area indicated on the sign • may be used in combination with: – parking permitted sign (RB-53) – no stopping sign (RB-55, RB-57 or RB-57A)
 RB-52B 30 x 45 cm	black	accessible parking sign • white background • red circle with red diagonal line superimposed over black capital letter P, above white and blue disabled person symbol beside words accessible parking by permit only in block capital black letters • may have: – 1 or 2 black arrows pointing in direction(s) in which parking is prohibited without required identification permit or number plate – block capital black letters and black numerals indicating length of time, hours of day and days of week during which parking is permitted • may be used to indicate parking by other than vehicles displaying an accessible permit or license plate is prohibited in the area indicated on the sign • may be used in combination with: – parking permitted sign (RB-53)

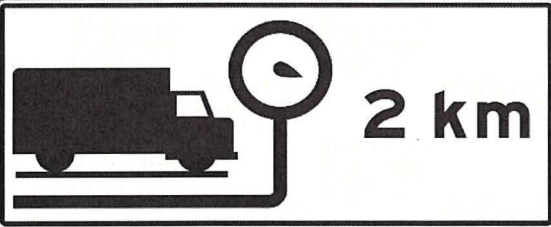
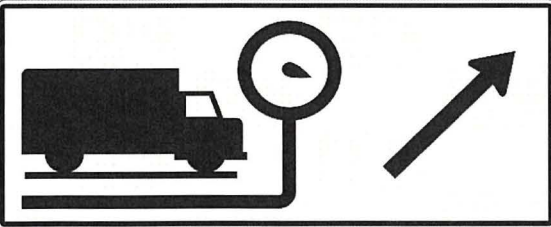
		– no stopping sign (RB-55, RB-57 or RB-57A)
 RB-53 30 x 45 cm	black	parking permitted sign • green circle circumscribing black capital letter “P” on white background • may have: – 1 or 2 black arrows pointing in direction(s) in which parking is permitted – block capital black letters and black numerals indicating length of time, hours of day or days of week during which parking is permitted – in block capital black letters, other wording that is determined necessary by a traffic authority • used to indicate that parking is restricted in the area indicated on the sign • may be used in combination with: – no parking sign (RB-51, RB-52, RB-52A) – accessible parking sign (RB-52B), – no stopping sign (RB-55, RB-57 or RB-57A)
   RB-55 RB-57 RB-57A 30 x 30 cm 30 x 45 cm 30 x 45 cm	black	no stopping sign • red circle with red diagonal line superimposed over black octagon on white background • may have: – 1 or 2 black arrows pointing in direction(s) in which stopping is prohibited – in block capital black letters, wording showing where stopping is prohibited, such as “on pavement”, “next 3 km”, “on tracks”, or “within 3 m of pavement” – block capital black letters and black numerals indicating hours

		of day and days of week during which stopping is prohibited - used to indicated that stopping is prohibited in the area indicated on the sign - may be used in combination with: no parking sign (RB-51, RB-52, RB-52A) - parking permitted sign (RB-52B) - accessible parking sign (RB-53)
 RB-61 60 x 60 cm	black	truck route sign - green circle circumscribing black symbol of truck on white background - used to indicate that the section of road is a truck route - may be supplemented by truck route arrows sign (RB-61SA, RB-61SB, RB-61SC) as part of sign or displayed as tab under sign
 RB-61SA 60 x 45 cm  RB-61SB 60 x 45 cm  RB-61SC 60 x 45 cm	black	truck route arrows sign - black arrow or arrows on white background or white arrow or arrows on black background - may have: - block capital black letters and black numerals on white background, or block capital white letters and white numerals on black background, indicating hours of day and days of week during which trucks are permitted on highway - may only be part of, or displayed as tab under, truck route sign (RB-61) to indicate that truck traffic approaching sign must proceed only in direction(s) shown by arrow(s) and only during any period of time shown

 RB-62 60 x 60 cm	black	truck prohibition sign - red circle with red diagonal line superimposed over black symbol of truck on white background - used to indicate that truck with registered weight of over 4500 kg must not be used on highway except to make local delivery or provide local service
 RB-63 60 x 75 cm	black	weight limit control sign - block capital black letters and black numerals on white background - numerals on sign indicate maximum gross vehicle weight in tonnes permitted for vehicle on the section of highway where sign is erected
 RB-63A 90 x 90 cm	black	bridge weight restriction sign - block capital black letters and black numerals on white background - numerals on sign indicate maximum allowable axle weight loads for various vehicles using bridge
 RB-63B 90 x 120 cm	black	vehicle combination bridge weight restriction sign - block capital black letters, black numerals and black symbols of trucks on white background - numerals on sign indicate maximum gross vehicle weights in tonnes allowed on bridge for - single unit vehicle - combination of 2-vehicle units - combination of 3-vehicle units

 RB-64 60 x 60 cm	black	snowmobile route sign • must have a green circle circumscribing a black symbol of a snowmobile on a white background • may be used to indicate that snowmobiles are permitted to travel on a specific section of road or within a specific area
 RB-65 60 x 60 cm	black	snowmobiles prohibited sign • red circle with red diagonal line superimposed over black symbol of snowmobile on white background • used to indicate that snowmobiles are prohibited in a specific area
 RB-66 60 x 60 cm	black	pedestrians prohibited sign • red circle with red diagonal line superimposed over black symbol of walking pedestrian on white background • used to indicate that pedestrians are prohibited in a specific area
 RB-67 60 x 60 cm	black	cycling prohibited sign • red circle with red diagonal line superimposed over black symbol of bicycle on white background • used to indicate that bicycles are prohibited in a specific area

 RB-68 90 x 150 cm	black	lane use restriction sign • white background • red circle with red diagonal line superimposed over black symbol of truck, above black downward pointing arrow • mounted above a lane where trucks are prohibited, to indicate that truck with registered weight of over 4500 kg is prohibited in the lane
 RB-69 60 x 60 cm	black	dangerous goods route sign • green circle circumscribing black diamond on white background • used to indicate that the highway is a route for vehicles transporting dangerous goods
 RB-70 60 x 60 cm	black	dangerous goods prohibited sign • red circle with red diagonal line superimposed over black diamond on white background • used to indicate that vehicles transporting dangerous goods are prohibited on the section of the highway where the sign is posted

 RB-73L 60 x 45 cm  RB-73R 60 x 45 cm	black	cross other side sign • white background • red circle with red diagonal line superimposed over black symbol of walking pedestrian, oriented so that pedestrian is walking in direction that pedestrians are permitted to cross • green circle circumscribing black symbol of walking pedestrian, oriented so that pedestrian is walking in direction that pedestrians are permitted to cross, with horizontal black arrow below circle pointing in direction that pedestrians are permitted to cross • used to indicate that pedestrians must not cross 1 leg of an intersection and direct pedestrians to where they are permitted to cross
 RB-76 210 x 90 cm	black	truck inspection station (advance) sign • black symbol of truck and scale and black numerals on white background • numerals on sign must indicate distance to scale (truck inspection station) • used to indicate that scale (truck inspection station) is ahead
 RB-77 210 x 90 cm	black	truck inspection station exit sign • black symbol of truck and scale and black upward-slanting arrow on white background • used to indicate exit for and direction to scale (truck inspection station)


 RB-78 30 x 45 cm	black	cycling prohibited on sidewalks sign • red circle with red diagonal line superimposed over black symbol of bicycle on white background • words “on sidewalk” in block capital black letters below red circle • used to indicate that bicycling is not permitted on a specific sidewalk
 RB-79 30 x 30 cm	black	dismount and walk sign • green circle circumscribing black symbol of pedestrian and bicycle on white background • used to indicate to indicate that cyclists are required to dismount and walk their bicycle in specific area • may be used in combination with dismount and walk tab sign (RB-79T) • may be used in combination with an ends sign (RB-33S2) to indicate end of dismount-and-walk zone and that cycling may be resumed
 RB-79T 30 x 15 cm	black	dismount and walk tab sign • block capital black letters on white background • used only in combination with and displayed under dismount and walk sign (RB-79)

RB-80 90 x 120 cm RB-80A 90 x 150 cm RB-81 90 x 120 cm RB-81A 90 x 150 cm	black Overhead reserved lane sign • white background • black symbol of bus, taxi, bicycle or car with white numeral on car symbol, or some combination of those, to right of white diamond on black rectangular area in upper left-hand corner of sign • black arrow indicating lane that is reserved • numeral shown on car symbol indicates minimum number of occupants required in vehicle, other than authorized bus, taxi or bicycle, to operate in lane indicated by sign • used to designate reserved lane on highway, and indicates that vehicles other than vehicles specified on sign must not use reserved lane • if lane is reserved only on particular days and between particular hours, sign must have block capital black letters and black numerals that indicate days or hours when reserved lane is in effect • RB-80 or RB-81 to be used when 1 or 2 vehicle symbols to be displayed, • RB-80A or RB-81A to be used when 3 or more vehicle symbols to be displayed, • RB-80 or RB-80A to be mounted directly above reserved lane • RB-81 or RB-81A to be side-mounted next to reserved lane • dates, times and combination of symbols displayed on reserved lane sign are as determined by traffic authority authorizing sign
RB-80S1 90 x 30 cm	black reserved lane begins tab sign • block capital black letters on white background

		used only in combination with reserved lane sign (RB-80, RB-80A, RB-81, RB-81A), displayed as tab under first reserved lane sign in series
 RB-80S2 90 x 30 cm	black	reserved lane ends tab sign - block capital black letters on white background - used only in combination with reserved lane sign (RB-80, RB-80A, RB-81, RB-81A), displayed as tab under sign, to indicate end of reserved lane
 RB-84 60 x 60 cm	black	in-line skating prohibited sign - red circle and diagonal line superimposed over black symbol of in-line skate on white background - used to indicate that in-line skating is prohibited in specific area
 RB-85 60 x 60 cm	black	motorcycles prohibited sign - red circle and diagonal line superimposed over black symbol of motorcycle on white background - used to indicate that motorcycles are prohibited in a specific area
 RB-86 60 x 60 cm	black	pedestrians and motorcycles prohibited sign - red circle and diagonal line superimposed over black symbol of pedestrian above black symbol of motorcycle, all on white background - used to indicate that pedestrians and motorcycles are prohibited in a specific area


 RB-87 60 x 60 cm	black	all-terrain vehicles prohibited sign • red circle and diagonal line superimposed over black symbol of all-terrain vehicle on white background • used to indicate that all-terrain vehicles and dirt bikes are prohibited in a specific area
 RB-88 60 x 60 cm	black	automobiles prohibited sign • red circle and diagonal line superimposed over black symbol of car on white background • used to indicate that motor vehicles other than motorcycles, all-terrain vehicles, dirt bikes and snowmobiles are prohibited in specific area • may be used in combination with except authorized vehicles tab sign (R-107)
 RB-89 60 x 60 cm	black	automobiles and motorcycles prohibited sign • red circle and diagonal line superimposed over black symbol of car above black symbol of motorcycle, all on white background • used to indicate that motor vehicles including motorcycles but not including all-terrain vehicles and snowmobiles are prohibited in specific area • may be used in combination with except authorized vehicles tab sign (R-107)

 RB-90 60 x 75 cm  RB-91 60 x 75 cm	black	reserved bicycle lane sign • white background • black symbol of bicycle to right of white diamond on black rectangular area in upper left-hand corner of sign • black arrow that indicates lane that is reserved for use exclusively by bicycles • position of reserved bicycle lane sign is determined by location of lane for which sign is intended, as follows: – RB-90 displayed directly above reserved bicycle lane – RB-91 displayed next to reserved bicycle lane • used to indicate that the lane adjacent to or under the sign is reserved for bicycles • not to be used when reserved bicycle lane is shared with buses, taxis or high-occupancy vehicles
 RB-92 60 x 75 cm	black	reserved bicycle lane ends sign • white background • black symbol of bicycle to right of white diamond on black rectangular area in upper left-hand corner of sign, with block capital black letters below • used at end of reserved bicycle lane to mark its end
 RB-93 30 x 45 cm	black	shared pathway sign • white background • green circle circumscribing black symbols of walking pedestrian and bicycle • words “shared pathway” below green circle in block capital black letters • used to indicate that both cyclists and pedestrians are permitted to use path

 RB-94L 30 x 45 cm  RB-94R 30 x 45 cm	black	shared sidewalk or pathway organization sign • black symbol of bicycle and black symbol of pedestrian and block capital black letters on white background • used to indicate to pedestrians and cyclists how to share sidewalk or pathway on which there is designated area provided for each
 RB-96 60 x 90 cm	black	engine brake prohibited sign • white background • black symbol of truck above words engine brake in block capital letters superimposed over red circle with diagonal line through it • used to indicate to drivers that use of diesel engine enhanced braking system is prohibited under normal circumstances
 RB-97 75 x 75 cm  RB-98 75 x 75 cm  RB-99 60 x 75 cm  RB-100 60 x 75 cm  RB-101 60 x 75 cm  RB-102 60 x 75 cm  RB-103 60 x 75 cm  RB-104 60 x 75 cm  RB-105 60 x 75 cm  RB-106 75 x 75 cm  RB-107 60 x 75 cm	white	roundabout lane designation signs • white curved arrows on black background • may have white dot in centre of curved arrow • used to indicate that traffic in lane in roundabout must proceed in direction shown for that lane
 RB-100S 60 x 30 cm	white	roundabout left lane tab sign • words "left lane" in block capital white letters on black background • used only in combination with and displayed under side-mounted

		roundabout lane designation sign (RB-97, RB-98, RB-99)
 CENTRE LANE RB-102S 60 x 30 cm	white	roundabout centre lane tab sign - words “centre lane” in block capital white letters on black background - used only in combination with and displayed under side-mounted roundabout lane designation sign (RB-101, RB-102, RB-103, RB-104, RB-106, RB-107)
 RIGHT LANE RB-104S 60 x 30 cm	white	roundabout right lane tab sign - words “right lane” in block capital white letters on black background - used only in combination with and displayed under side-mounted roundabout lane designation sign (RB-101, RB-102, RB-103, RB-104, RB-106, RB-107)
 NO FISHING FROM BRIDGE RC-2 45 x 60 cm	black	no fishing from bridge sign - block capital black letters on white background - use to indicate that fishing is not permitted from the bridge on which the sign is erected
 STOP LINE RC-4L 60 x 75 cm	black	stop line sign - block capital black letters on white background, together with black arrow that indicates location of stop line at which traffic approaching traffic control device must stop - oriented so that arrow on sign points toward roadway
 STOP LINE RC-4R 60 x 75 cm		

 RC-5 60 x 60 cm	black	littering prohibited sign red circle with red diagonal line superimposed over black symbol of can on white background
 RC-6 75 x 75 cm	black	seat belt sign - green circle circumscribing black symbol of seated person wearing seat belt on white background - used to remind vehicle occupants they must wear seat belts
 RC-6 (OPTIONAL) 240 x 120cm	black	seat belt sign (optional) block capital black letters on white background - green circle circumscribing black symbol of seated person wearing seat belt on white background - used to remind vehicle occupants they must wear seat belts
 WC-1 60 x 60 cm	black	school area sign - black symbol of walking schoolboy and schoolgirl on fluorescent yellow-green background - used to indicate beginning of school area


 R-100 90 x 60 cm	red	wrong way sign • block capital white letters on red background • used to indicate to drivers they are proceeding the wrong way on a one-way highway
 R-101 60 x 75 cm	black	through traffic keep right sign • block capital black letters on white background • used to indicate that traffic proceeding through an intersection must stay to the right
 R-102 60 x 75 cm	black	end school area sign • block capital black letters on fluorescent yellow-green background • used to indicate end of school area and speed limit in effect is speed limit that applies immediately before beginning of that school area • may be used in combination with end school area tab sign (R-102T)
 R-102T 60 x 30cm	black	end school area tab sign • block capital black letters on fluorescent yellow-green background • may be used only in combination with and mounted directly under maximum speed sign (RB-1) to indicate end of school area and that speed limit is as indicated by RB-1 sign

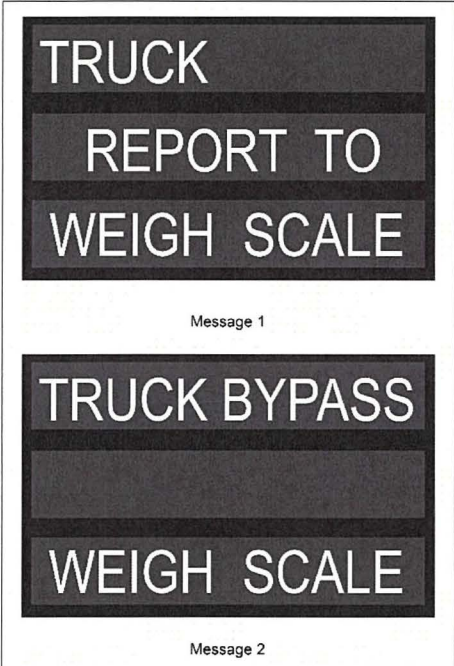
 R-103T 60 x 45cm	black	school area maximum speed 30 tab sign • block capital black letters and black numerals on white background • may be used only in combination with and displayed under school area sign (WC-1) to indicate that maximum speed in school area is 30 km/h when children present
 R-104T 60 x 75cm	black	school area maximum speed 50 tab sign • block capital black letters and black numerals on white background • may be used only in combination with and displayed under school area sign (WC-1) to indicate that maximum speed in school area is 50 km/h when children present
 R-105 60 x 30 cm	black	except with green arrow sign • block capital black letters on white background • used only in combination with and displayed directly under a no right turn on red sign (RB-17R) or a no left turn on red sign (RB-17L)
 R-107 60 x 45 cm	black	except authorized vehicles tab sign • block capital black letters on white background • used only in combination with and displayed under any of following signs to indicate that approaching authorized vehicles (as determined by traffic authority authorizing signs) are not required to comply with sign under which tab sign is displayed: – through traffic prohibited sign (RB-10) – prohibitive turn control sign (RB-11L, RB-11R or RB-16)

		– restrictive turn control sign (RB-14L, RB-14R, RB-15 or RB-15A) – any other regulatory sign that approaching authorized vehicle is not required to comply with
 R-108 60 x 30 cm	black	time sign • block capital black letters and black numerals on white background • used only in combination with and displayed under – turn control sign (RB-11 to RB-16A inclusive) – do not pass sign (RB-31) – do not enter sign (RB-23) • letters and numerals on sign must indicate hours of day and days of week during which other sign applies
 R-109 30 x 22.5 cm	red	tow-away zone tab sign • block capital red letters on white background • used only in combination with and displayed with – no parking sign (RB-51 to RB-52B inclusive) – no stopping sign (RB-55 to RB-57A inclusive)
 R-110 75 x 60 cm	black	emergency parking only sign • block capital black letters on white background • used to indicate that parking in a specific area is permitted only during emergency situations
 R-112 60 x 60 cm	black	slow moving vehicles prohibited sign • white background • red circle with red diagonal line superimposed over orange triangle with red border • used to indicate that slow moving vehicles are prohibited in a specific area

 R-113 60 x 45 cm	black	keep off median sign • block capital black letters on white background • used to indicate that vehicles are not permitted on the median of a highway
 R-114 90 x 120 cm	black	do not drive on paved shoulder sign • block capital black letters on white background • used to indicate that driving on paved shoulder is prohibited in a specific area
 R-115 75 x 75 cm	black	do not cross median sign • block capital black letters on white background • used to indicate that crossing the median of a highway is not permitted • may be used in combination with an except authorized vehicles sign (R-107)
 R-116 120 x 75 cm	black	street closed local traffic only sign • block capital black letters on white background • used to indicate that a section of a street is closed to through traffic

 R-117 120 x 75 cm  R-118 120 x 75 cm	black	road closed detour sign • block capital black letters and black single-headed or double-headed arrow on white background • used to indicate that traffic approaching sign must proceed in direction, or 1 of directions, shown by arrows
 R-119 300 x 90 cm  R-120 300 x 90 cm	black	all traffic exit left or all traffic exit right sign • block capital black letters and black arrow on white background • used to indicated that all traffic approaching the sign must exit the highway in the direction of the arrow
 R-121 95 x 120 cm	black	vehicles over 12 tonnes reduce speed sign • block capital black letters on white background • used to indicate that vehicles with a gross weight in excess of the weight shown on the sign must reduce speed in a specific area

 R-122 95 x 120 cm	black	vehicles over 12 tonnes 15 km/h on bridge sign • block capital black letters on white background • used to indicate that vehicles with a gross weight in excess of the weight shown on the sign must reduce speed on the bridge that the sign is erected in advance of
 R-123 60 x 45 cm	black	gross weight sign • block capital black letters and black numerals on white background • used only in combination with and displayed under – truck route sign (RB-61) – truck prohibition sign (RB-62) • used to indicate that vehicle with gross weight in excess of gross weight stated on sign must not be used on highway
 R-124 90 x 75 cm	black	shut off your radio transmitter sign • block capital black letters on white background • used to indicate to drivers to turn off any radio transmitters within the vehicle when entering an area where blasting is taking place
 R-125 335 x 152 cm	black	trucks and truck/trailer combinations over 4500 kg registered weight report to scale sign • block capital black letters on white background • used to indicate that vehicle, or vehicle combination, with total registered weight of over 4500 kg must report to upcoming scale (truck inspection station)

 R-126 240 x 240 cm	black	report to scale when directed sign • symbol of black truck and scale and block capital black letters on white background • used to indicate that truck must report to scale (truck inspection station) when directed by truck report to/bypass scale sign (R-127)
 Message 1 Message 2 R-127 240 x 150 cm	white	truck report to/bypass scale sign • lighted electronic display on black background that displays 1 of following messages in block capital letters: – truck report to scale, to indicate that truck must report to scale (truck inspection station) – truck bypass scale, to indicate that truck may bypass scale (truck inspection station)
 R-128 120 x 150 cm	black	trucks right lane only next X km sign • block capital black letters on white background • used to indicate that driver of vehicle, or vehicle combination, with registered weight in excess of 4500 kg must use only right lane for distance specified on sign

 R-129 90 x 120 cm	black	do not pass here to crosswalk sign • white background • red circle with red diagonal line superimposed over 2 black symbols of car, with words “do not pass here to crosswalk” in block capital black letters below symbols • used to indicate that overtaking of other vehicles is not permitted between the sign and crosswalk that the sign is erected in advance of
 R-130 30 x 45 cm	black	shared sidewalk sign • white background • green circle circumscribing black symbol of walking pedestrian above black symbol of bicycle • words “shared sidewalk” in block capital black letters below green circle • used to indicate that cyclists and pedestrians may both use sidewalk, as determined by traffic authority authorizing sign
 R-200 60 x 75 cm	black	no lane change ahead sign • block capital black letters on white background with upward pointing black arrow • used only in advance of the following signs to indicate that there is an area ahead where traffic must not change from one lane to another – no lane change sign (R-201) – no lane change overhead sign (R-202)

 R-201 60 x 75 cm	black	no lane change sign • block capital black letters on white background • used to indicate beginning of area where traffic must not change from one lane to another
 R-202 60 x 75 cm	black	no lane change overhead sign • block capital black letters on white background with downward pointing black arrow • mounted only above lane to indicate that traffic in that lane must not travel from that lane to another lane
 R-203 60 x 75 cm	black	end no lane change sign • block capital black letters on white background • used to indicate end of no-lane-change area
 R-204 60 x 60 cm	black	all-terrain vehicle route sign • must have a green circle circumscribing a black symbol of an all-terrain vehicle on a white background • may be used to indicate that all-terrain vehicles and dirt bikes are permitted to travel on a specific section of road or within a specific area

- (3) Any distance, speed, weight, time or date shown on a depiction of an official traffic sign in the table in subsection (1) is for illustration purposes only.

- (4) The following exemptions to the official signs are acceptable if erected before these regulations come into force:

Identifier	Exemption or modification permitted
RA-IS5 all-way tab sign RA-IS4 4-way tab sign	may have block capital black letters on white background

12 Lettering style, dimensions and proportions of signs

- (1) Except as permitted by subsection (3), letters, numerals and symbols on an official traffic sign must conform as nearly as possible to the styles and proportions shown on the sign as depicted in the table in Section 11.
- (2) Except as permitted by subsection (3), the dimensions specified in the table in Section 11 for an official traffic sign are the minimum dimensions allowed and may be increased proportionally.
- (3) An official traffic sign used on an active transportation facility solely to control the movement of active transportation users on the active transportation facility may have the same minimum dimensions as indicated in the National Manual for a sign.

13 Maximum or minimum rate of speed or speed limit

- (1) The sign posted under Section 23 of the Act by a traffic authority to display the maximum speed on a highway under its jurisdiction must display the following:
 - (a) the words “maximum” or “truck maximum”;
 - (b) the rate of speed, expressed as a numeral without description or qualifying words.
- (2) Notice to a driver on a highway of a minimum rate of speed in kilometres per hour that has been fixed and approved for a highway may be given by the posting of an official traffic sign on which is displayed both of the following:
 - (a) the word “minimum”;
 - (b) the rate of speed, expressed as a numeral without description or qualifying words.

14 Displaying time of day

An official traffic sign that displays a time of day may use

- (a) the letter “h” to designate an hour; and
- (b) the letter “m” to designate a minute.