




Pb

LEGEND

- Sample number ..... e.g. 82-1-025  
 Analytical value in p.p.m. (unless otherwise specified) ... e.g. 1.06
- Geochemical Sample Medium
- Stream sediment, sieved
  - Stream sediment, unsieved
  - Lake sediment
  - Heavy mineral / panned concentrate
  - Soil
  - Rock
  - Peat
  - Till
  - Other

Note: Two (2) sample numbers per sample location indicates duplicate sample site. e.g. 82-1-025,026

HISTOGRAM AND BASIC STATISTICS

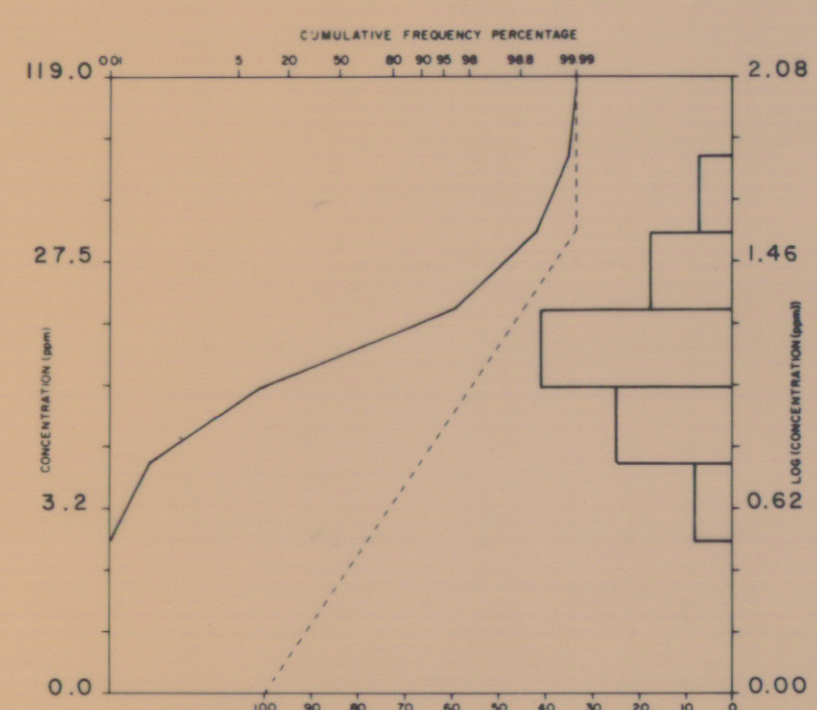


Note: Only data within this 1:50,000 sheet is included.

Average: 18.48  
 Number of samples: 135  
 Standard deviation: 1.41  
 Range: 4.00-120.00  
 Detection limit: 2 ppm

Sample collection and Geochemistry: P.J. Rogers and M.A. MacDonald  
 Analyses: Chemex Laboratories Ltd., North Vancouver, B.C.  
 Sample digestion: Hot HNO<sub>3</sub> - HCL Extraction  
 Analytical technique: Air - Acetylene AAS

TABLEAU D'ASSEMBLAGE DU SYSTÈME NATIONAL DE RÉFÉRENCE CARTOGRAPHIQUE



INDEX TO ACCOMPANY MAPS OF THE NATIONAL TOPOGRAPHIC SYSTEM

Produced by the SURVEYS AND MAPPING BRANCH  
 DEPARTMENT OF ENERGY, MINES AND RESOURCES  
 DÉPARTEMENT DE L'ÉNERGIE, DES MINES ET DES RESSOURCES  
 1984

Scale 1:50,000 Échelle

Meters: 0 1000 2000 3000 4000  
 Feet: 0 1000 2000 3000 4000

PLEASANT BAY  
NOVA SCOTIA

Scale 1:50,000 Échelle

Meters: 0 1000 2000 3000 4000  
 Feet: 0 1000 2000 3000 4000

International Geodetic Association and geodetic elevation of bench marks can be obtained by writing to the Geodetic Survey, Survey and Mapping Branch, Ottawa

Do not allow the unbalanced load on the lines of a cable to be used for the purpose of leveling. The cable should be used for leveling only.

CONVERSION SCALE FOR ELEVATIONS

Feet: 0 100 200 300 400 500 600 700 800 900 1000  
 Meters: 0 30 60 90 120 150 180 210 240 270 300

Les coordonnées des renseignements sur les cartes et les données exactes des points de levés peuvent être obtenues en écrivant au Directeur des levés et de la cartographie, Direction des levés et de la cartographie, Ottawa

Do not allow the unbalanced load on the lines of a cable to be used for the purpose of leveling. The cable should be used for leveling only.

CONVERSION DES ÉLEVATIONS

Pieds: 0 100 200 300 400 500 600 700 800 900 1000  
 Mètres: 0 30 60 90 120 150 180 210 240 270 300

Les cartes sont en vente au Bureau des Cartes du Canada, Ministère de l'Énergie, des Mines et des Ressources, Ottawa, au Canada

Do not allow the unbalanced load on the lines of a cable to be used for the purpose of leveling. The cable should be used for leveling only.

© 1981, by the Queen's Printer in Canada  
 Department of Energy, Mines and Resources

OPEN FILE  
DOSSIER PUBLIC  
986  
Geological  
Survey  
Commission  
Geologique  
Ottawa

OPEN FILE  
OFM 84-12  
Nova Scotia  
Department of  
Mines and Energy