

Ag


LEGEND

- Sample number e.g. 82-1-025
- Analytical value in p.p.m. (unless otherwise specified) .. e.g. 106
- Geochemical Sample Medium
- Stream sediment, sieved *
 - Stream sediment, unsieved o
 - Lake sediment □
 - Heavy mineral / panned concentrate ⊙
 - Soil ◻
 - Rock ▽
 - Peat △
 - Other ■

Note: Two (2) sample numbers per sample location indicates duplicate sample site. e.g. 82-1-025, 026

N.R. = No Result

HISTOGRAM AND BASIC STATISTICS

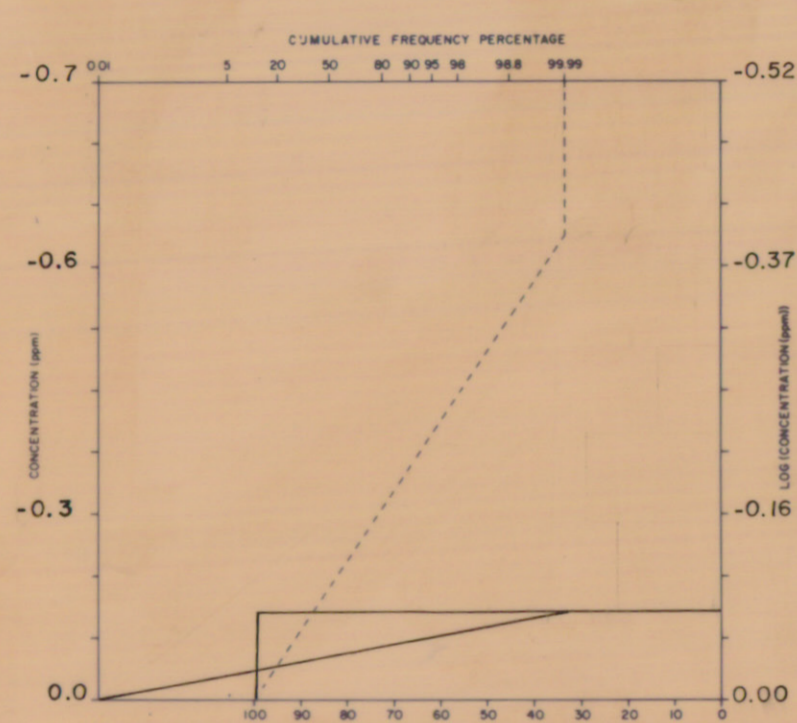

Note: Only data within this 1:50,000 sheet is included.

- Average: 0.11
 Number of samples: 97
 Standard deviation: 0.01
 Range: 0.10 - 0.30
 Detection limit: 0.2 ppm

Sample collection and Geochemistry: P.J. Rogers and M.A. MacDonald
 Analyses: Chemex Laboratories Ltd., North Vancouver, B.C.
 Sample digestion: Hot HNO₃ - HCl Extraction
 Analytical technique: Air Acetylene AAS


TABLIÉU D'ALIGNEMENT DU SYSTÈME NATIONAL DE RÉFÉRENCE CARTOGRAPHIQUE

11F/14	11F/15	11F/16
11F/11	11F/10	11F/9
11F/6	11F/7	

INDEX TO ADJOINING MAPS OF THE NATIONAL TOPOGRAPHIC SYSTEM



ST. PETER'S
 RICHMOND MUNICIPALITY - RICHMOND COUNTY
 NOVA SCOTIA
 Scale 1:50 000 Echelle

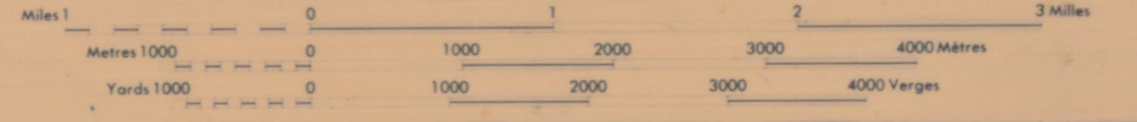

Information concerning location and precise elevation of bench marks can be obtained by referring to the Geodetic Survey, Survey and Mapping Branch, Ottawa.

On peut obtenir des renseignements sur la localisation et l'altitude exacte des repères de nivellement en consultant nos cartes géométriques, Direction des Travaux de la Cartographie, Ottawa.

CONVERSION SCALE FOR ELEVATIONS
 Meters: 0 100 200 300 400 500 600 700 800 900 1000
 Feet: 0 300 600 900 1200 1500 1800 2100 2400 2700 3000

ECHILLE DE CONVERSION DES ALTITUDES
 Mètres: 0 100 200 300 400 500 600 700 800 900 1000
 Pieds: 0 300 600 900 1200 1500 1800 2100 2400 2700 3000

Notes:
 Hand surface of weathered rock: 1: 1/4" = 100 feet
 Hand surface of weathered rock: 2: 1/8" = 50 feet
 Lower on subsided surface at weathered rock: 1/8" = 50 feet
 Lower on surface of weathered rock: 1/16" = 25 feet
 Unweathered rocks: 1/32" = 12 1/2 feet
 1:16" full line or portage: 1/64" = 6 1/4 feet
 FOR COMPLETE REFERENCE USE REVERSE SIDE. POUR UNE LISTE COMPLÈTE DES SIGNES VOIR LE VERSO

Produced by the SURVEY AND MAPPING BRANCH, DEPARTMENT OF ENERGY, MINES AND RESOURCES, updated from aerial photographs taken in 1974. Contour interval 100 feet.
 Copied and revised from the Canada Map Office, Department of Energy, Mines and Resources, Ottawa, at first issue of this edition.
 © 1985. No Warranty The Queen in Right of Canada, Department of Energy, Mines and Resources.

OPEN FILE
 DOSSIER PUBLIC
 1271
 Geological Survey
 Commission Géologique
 Ottawa

CONTRIBUTION TO CANADA - NOVA SCOTIA
 CO-OPERATIVE MINERAL PROGRAM 1981-84

OPEN FILE
 OFM 86-30
 Nova Scotia
 Department of
 Mines and Energy