


**DRAFT FOR CONSULTATION PURPOSES ONLY**

**Schedule “A”**

**Weight and Dimension Limits of Schedule A Vehicles by Configuration**

**Category 1- Truck-Tractor Semi-trailer**

**1 Truck-Tractor Semi-trailer Dimension Limits**

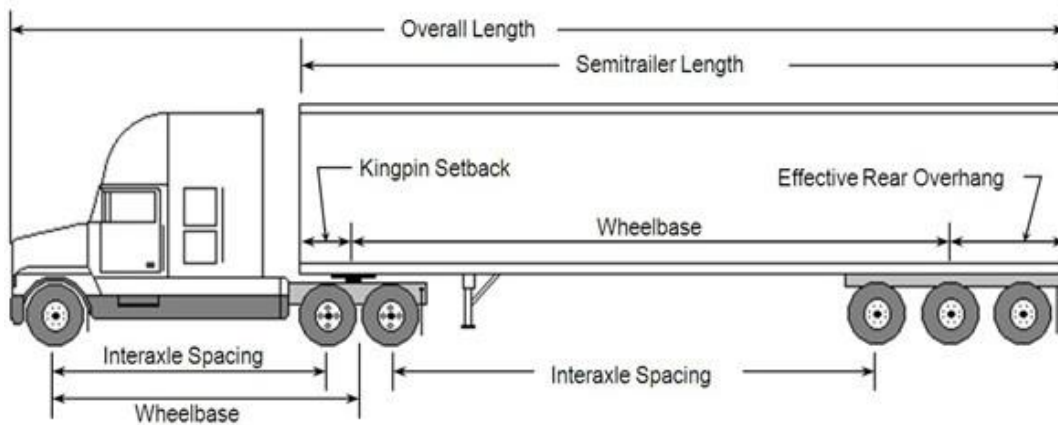


Dimension Limits- Truck-tractor Semi-trailer	
Vehicle Combination	
Dimension	Maximum
Overall Length	23 m
Overall Width	2.6 m
Overall Height	4.15 m
Truck-Tractor	
Dimension	Limit
Wheelbase	Maximum 6.2 m
Tandem axle spread	Minimum 1.2 m/ Maximum 1.85 m
Semi-trailer	
Dimension	Limit
Length	Maximum 16.2 m
Wheelbase	Minimum 6.25 m/Maximum 12.5 m
Kingpin setback	Maximum 2.0 m radius
Effective rear overhang	Maximum 35% of wheelbase
Tandem axle spread	Minimum 1.2 m/Maximum > 1.85 m
Tridem axle spread	Minimum 2.4 m/Maximum 3.7 m
Triaxle axle spread	Minimum 2.4 m/Maximum 4.8 m
Track width	Minimum 2.5 m/Maximum 2.6 m

## Interaxle Spacing

Dimension	Minimum
Single Axle to Single, Tandem, or Tridem Axle	3.0 m
Tandem Axle to Tandem Axle	5.0 m
Tandem Axle to Tridem Axle	5.5 m

## 2 Truck-tractor Semi-trailer Weight Limits

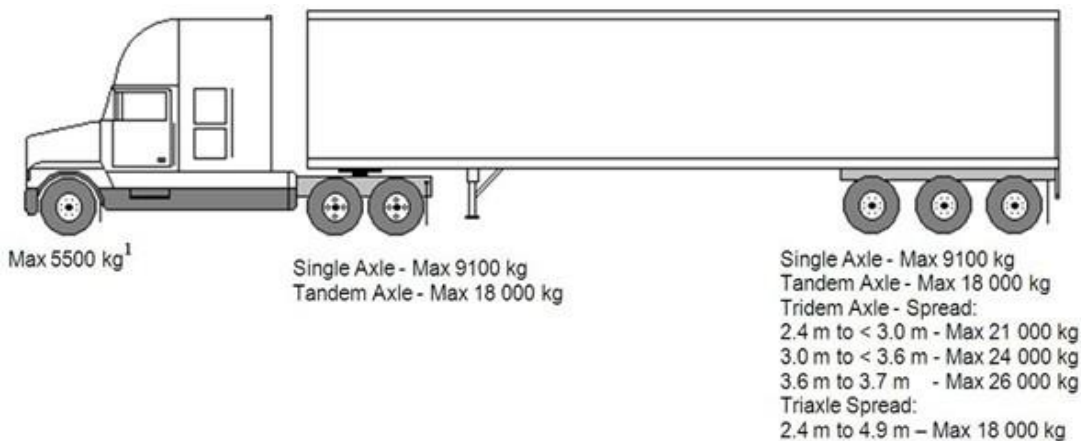

## Weight Limits- Truck-tractor Semi-trailer

### Axle Weight Limits

Axle Group	Axle spread		Weight Limit (Maximum)
Steering Axle	N/A		5 500 kg
Single Axle	N/A		9 100 kg
	<b>Tandem Axle</b> (including tandem equivalent axle)		
	1.2 m to 1.85 m		18 000 kg
	> 1.85 m		18 000 kg
	<b>Tridem Axle</b> (including tridem equivalent axle)		
	2.4 m to < 3.0 m		21 000 kg
	3.0 m to < 3.6 m		24 000 kg
	3.6 m to 3.7 m		26 000 kg
	> 3.7 m		18 000 kg
	<b>Triaxle Axle</b>		
	2.4 m to < 3.0 m		18 000 kg
	3.0 m to < 3.6 m		18 000 kg
	3.6 m to 4.9 m		18 000 kg

### GVW Limits (Maximum)

Axles and axle spread	Class of Highway			
	Maximum Weight	B-train roads	Intermediate Weight	All other
3 axles	23 700 kg	23 700 kg	23 700 kg	23 700 kg
4 axles—with tandem spread 1.2 m to 1.85 m	32 600 kg	32 600 kg	32 600 kg	32 600 kg


4 axles—with semi-trailer tandem spread > 1.85 m	32 600 kg	32 600 kg	32 600 kg	32 600 kg
5 axles—with tandem spreads 1.2 m to 1.85 m	41 500 kg	41 500 kg	41 500 kg	41 500 kg
5 axles—with semi-trailer tandem spread > 1.85 m	41 500 kg	41 500 kg	41 500 kg	41 500 kg
5 axles—with tridem spread 2.4 m to < 3.0 m	35 600 kg	35 600 kg	35 600 kg	32 600 kg
5 axles—with tridem spread 3.0 m to < 3.6 m	38 600 kg	38 600 kg	38 600 kg	32 600 kg
5 axles—with tridem spread 3.6 m to 3.7 m	40 600 kg	40 600 kg	38 600 kg (if tridem axle = or < 24 000 kg)	32 600 kg
5 axles—with tridem spread > 3.7 m	32 600 kg	32 600 kg	32 600 kg	32 600 kg
5 axles—with triaxle spread 2.4 m to < 3.0 m	32 600 kg	32 600 kg	32 600 kg	32 600 kg
5 axles—with triaxle spread 3.0 m to < 3.6 m	32 600 kg	32 600 kg	32 600 kg	32 600 kg
5 axles—with triaxle spread 3.6 m to 4.9 m	32 600 kg		32 600 kg	32 600 kg
6 axles—with tridem spread 2.4 m to < 3.0 m	44 500 kg	44 500 kg	44 500 kg	41 500 kg
6 axles—with tridem spread 3.0 m to < 3.6 m	47 500 kg	47 500 kg	47 500 kg	41 500 kg
6 axles—with tridem spread 3.6 m to 3.7 m	49 500 kg	49 500 kg	49 500 kg	41 500 kg
6 axles—with tridem spread > 3.7 m	41 500 kg	41 500 kg	41 500 kg	41 500 kg
6 axles—with triaxle spread 2.4 m to < 3.0 m	41 500 kg	41 500 kg	41 500 kg	41 500 kg
6 axles—with triaxle spread 3.0 m to < 3.6 m	41 500 kg	41 500 kg	41 500 kg	41 500 kg
6 axles—with triaxle spread 3.6 m to 4.9 m	41 500 kg	41 500 kg	41 500 kg	41 500 kg

## Category 1A: Tridem Drive Truck-tractor Semi-Trailer

### 1 Tridem Drive Truck-tractor Semi-Trailer Dimension Limits

Category 1A: Tridem Drive Tractor-Semitrailer

Dimension Limits

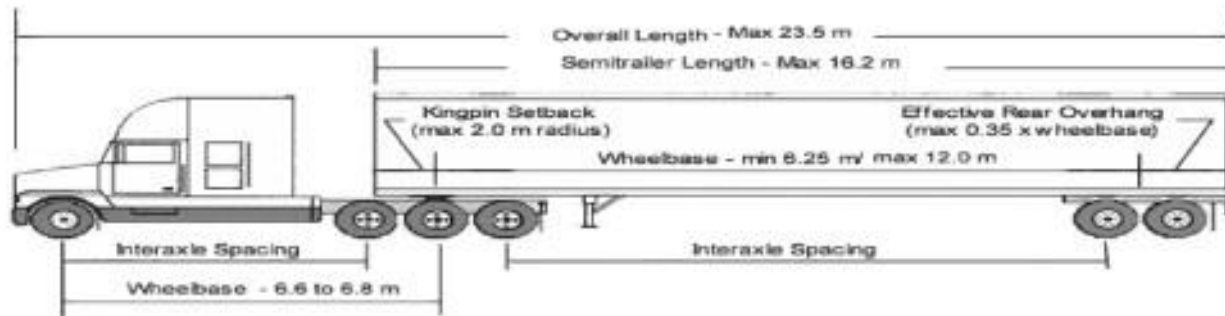

#### Dimension Limits- Tridem Drive Truck-tractor Semi-trailer

##### Vehicle Combination

Dimension	Maximum
Overall Length	23.5 m
Overall Width	2.6 m
Overall Height	4.15 m

##### Truck-Tractor

Dimension	Limit
Wheelbase	Minimum 6.6 m/Maximum 6.8 m
Tridem drive axle spread	Minimum 2.4 m/Maximum 2.8 m


##### Semi-trailer

Dimension	Limit
Length	Maximum 16.2 m
Wheelbase single, tandem or tridem	Minimum 6.25 m/Maximum 12.0 m
Kingpin setback	Maximum 2.0 m radius
Effective rear overhang	Maximum 35% of wheelbase
Tandem axle spread	Minimum 1.2 m/Maximum 1.85 m
Tridem axle spread	Minimum 2.4 m/Maximum 3.7 m
Track width	Minimum 2.5 m/Maximum 2.6 m

##### Interaxle Spacing

Dimension	Minimum
Single Axle to tridem Axle	3.0 m
Tandem axle to tridem axle	5.5 m
Tridem axle to tridem axle	6.0 m

## Tridem Drive Truck-tractor Semi-Trailer Weight Limits

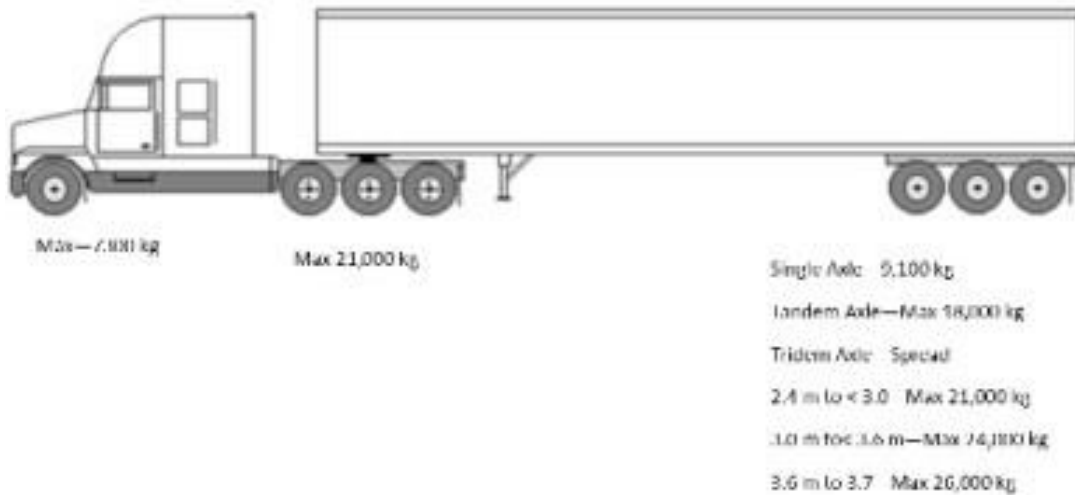

### Weight Limits- Tridem Drive Truck-tractor Semi-trailer

#### Axle Weight Limits

Axle Group	Axle spread	Weight Limit (Maximum)
Steering Axle	N/A	7300 kg
Single Axle	N/A	9 100 kg
Tandem Axle		
	1.2 m to 1.85 m	18 000 kg
Tridem Axle		
Tractor drive axle	2.4 m to 2.8 m	21 000 kg
Semi-trailer axle	2.4 m to < 3.0 m	21 000 kg
Semi-trailer axle	3.0 m to < 3.6 m	24 000 kg
Semi-trailer axle	3.6 m to 3.7 m	26 000 kg


#### GVW Limits (Maximum)

Semi-trailer Axle Group & Axle spread	Class of Highway			
	Maximum Weight	B-train roads	Intermediate Weight	All other
Single axle	37 400 kg	37 400 kg	37 400 kg	37 400 kg
Tandem	46 300 kg	46 300 kg	46 300 kg	41 500 kg
Tridem 2.4 m to < 3.0 m	49 300 kg	49 300 kg	49 300 kg	41 500 kg
Tridem 3.0 m to < 3.6 m	52 300 kg	52 300 kg	49 500 kg	41 500 kg
Tridem 3.6 m to 3.7 m	54 300 kg	54 300 kg	49 500 kg	41 500 kg

## Category 2: A-Train Double

1

### A-Train Double Dimension Limits

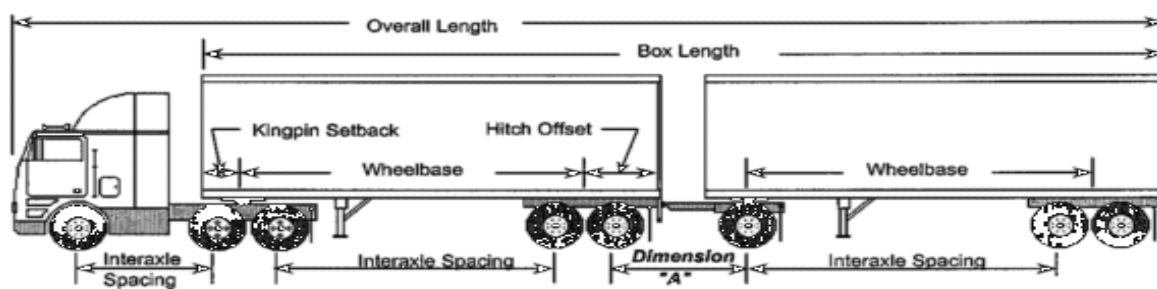

#### Vehicle Combination

Dimension	Maximum
Overall Length	25 m
Overall Width	2.6 m
Overall Height	4.15 m

#### Box

Dimension	Maximum
Length	20 m

#### Truck-Tractor

Dimension	Limit
Wheelbase	Maximum 6.2 m
Tandem axle spread	Minimum 1.2 m/Maximum 1.85 m

#### Lead Semi-trailer

Dimension	Limit
Wheelbase	Minimum 6.25 m
Kingpin setback	Maximum 2.0 m radius
Tandem axle spread	Minimum 1.2 m/Maximum 1.85 m
Hitch offset	Maximum 1.8 m
Track width	Minimum 2.5 m/Maximum 2.6 m


#### Second Semi-trailer or Full Trailer

Wheelbase	Minimum 6.25 m
Tandem axle spread	Minimum 1.2 m/Maximum 1.85 m
Track width	Minimum 2.5 m/Maximum 2.6 m

#### Interaxle Spacing

Dimension	Minimum
Single Axle to Single or Tandem Axle	3.0 m
Tandem Axle to Tandem Axle	5.5 m
Dimension A	Not controlled

## A-Train Double Weight Limits

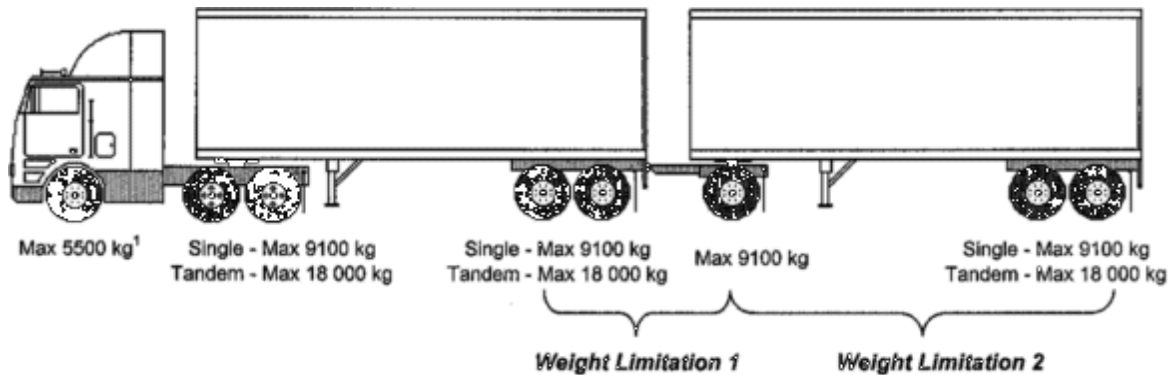

### Weight Limits- A-Train Double

#### Axle Weight Limits

Axle Group	Axle spread	Weight Limit (Maximum)
Steering Axle	N/A	5 500 kg
Single Axle	N/A	9 100 kg
<b>Tandem Axle (including tandem equivalent axle)</b>		
	1.2 m to 1.85 m	18 000 kg
<b>Other Weight Limitations</b>		
<b>Limitation</b>	<b>axles</b>	<b>maximum</b>
sum of lead semi-trailer axle weights plus converter dolly axle weights, if Dimension A is < 3 m	2 axle group 3 axle group	18 000 kg 24 000 kg
second semi-trailer or full trailer axle weights	must not exceed the weight of the truck- tractor drive axle(s) plus the weight of the axle(s) on the first semi-trailer	


#### GVW Limits (Maximum)

Axles	Class of Highway		
	Maximum Weight and B-train roads	Intermediate Weight	All other
5 axles	41 900 kg	41 900 kg	41 500 kg
6 axles	50 800 kg	49 500 kg	41 500 kg
7 axles	53 500 kg	49 500 kg	41 500 kg
8 axles	53 500 kg	49 500 kg	41 500 kg

## Category 3: B-Train Double

1

### B-Train Double Dimension Limits

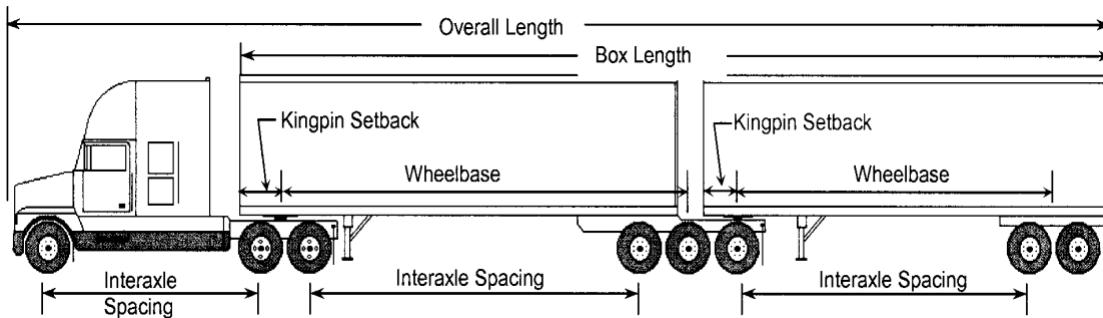

### Dimension Limits- B-Train Double

#### Vehicle Combination

Dimension	Maximum
Overall Length	27.5 m
Overall Width	2.6 m
Overall Height	4.15 m

#### Box

Dimension	Maximum
Length	20 m

#### Truck-Tractor

Dimension	Limit
Wheelbase	Maximum 6.8 m
Tandem axle spread	Minimum 1.2 m/Maximum 1.85 m

#### Lead Semi-trailer

Dimension	Limit
Wheelbase	Minimum 6.25 m
Kingpin setback	Maximum 2.0 m radius
Tandem axle spread	Minimum 1.2 m/Maximum 1.85 m
Tridem axle spread	Minimum 2.4 m/Maximum 3.1 m
Track width	Minimum 2.5 m/Maximum 2.6 m
Fifth wheel position	Maximum 0.3 m behind the center of the rearmost axle on the semi-trailer

#### Second Semi-trailer

Dimension	Limit
Wheelbase	Minimum 6.25 m
Kingpin setback	Maximum 2.0 m radius
Tandem axle spread	Minimum 1.2 m/Maximum 1.85 m
Tridem axle spread	Minimum 2.4 m/Maximum 3.1 m
Track width	Minimum 2.5 m/Maximum 2.6 m


#### Sum of Semi-Trailer Wheelbases

Tractor wheel-base dimension	Maximum
≤ 6.2 m	17.0 m



> 6.2 m to 6.3 m	16.53 m
> 6.3 m to 6.4 m	16.44 m
> 6.4 m to 6.5 m	16.36 m
> 6.5 m to 6.6 m	16.27 m
> 6.6 m to 6.7 m	16.19 m
> 6.7 m to 6.8 m	16.10 m
<b>Interaxle Spacing</b>	
<b>Dimension</b>	<b>Minimum</b>
Single Axle to Single or Tandem Axle	3.0 m
Tandem Axle to Tandem Axle	5.0 m
Tandem axle to tridem axle	5.5 m

## 2 B-Train Double Weight Limits

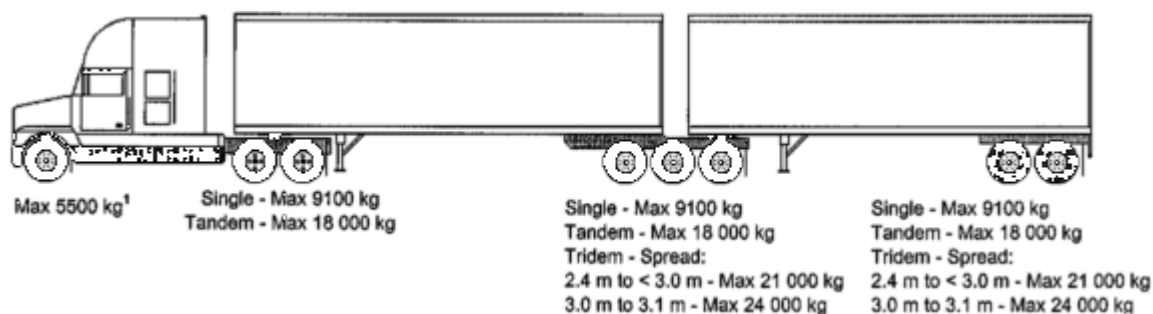


Weight Limits- B-Train Double				
Axle Weight Limits				
Axle Group		Axle spread		Weight Limit (Maximum)
Steering Axle		N/A		5 500 kg
Single Axle		N/A		9 100 kg
Tandem Axle (including tandem equivalent axle)				
		1.2 m to 1.85 m		18 000 kg
Tridem Axle				
		2.4 m to < 3.0 m		21 000 kg
		3.0 m to 3.1 m		24 000 kg
GVW Limits (Maximum)				
Axles		Class of Highway		
	Maximum Weight	B-train roads	Intermediate Weight	All other
4 axles	32 800 kg	32 800 kg	32 800 kg	32 800 kg
5 axles	41 700 kg	41 700 kg	41 700 kg	41 500 kg
6 axles	50 600 kg	50 600 kg	49 500 kg	41 500 kg
7 axles	59 500 kg	59 500 kg	49 500 kg	41 500 kg
8 axles	62 500 kg	62 500 kg	49 500 kg	41 500 kg

## Category 4: C-Train Double

1


### C-Train Double Dimension Limits

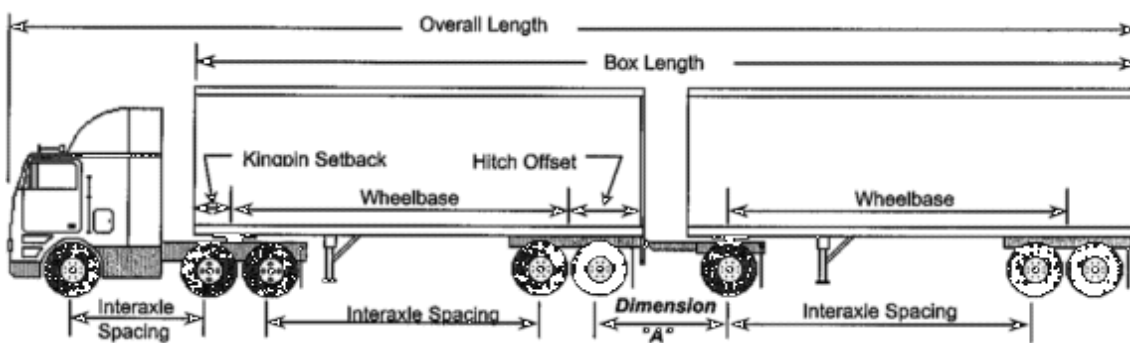

Dimension Limits- C Train Double	
Vehicle Combination	
Dimension	Maximum
Overall Length	25 m
Overall Width	2.6 m
Overall Height	4.15 m
Box	
Dimension	Maximum
Length	20 m
Truck-Tractor	
Dimension	Limit
Wheelbase	Maximum 6.2 m
Tandem axle spread	Minimum 1.2 m/Maximum 1.85 m
Lead Semi-trailer	
Dimension	Limit
Wheelbase	Minimum 6.25 m
Kingpin setback	Maximum 2.0 m radius
Tandem axle spread	Minimum 1.2 m/Maximum 1.85 m
Hitch offset	Maximum 1.8 m
Track width	Minimum 2.5 m/Maximum 2.6 m
Second Semi-trailer or Full Trailer	
Wheelbase	Minimum 6.25 m
Tandem axle spread	Minimum 1.2 m/Maximum 1.85 m
Track width	Minimum 2.5 m/Maximum 2.6 m
C Dolly Drawbar	
Dimension	Maximum
Length	2.0 m
Interaxle Spacing	
Dimension	Minimum

Single Axle to Single or Tandem Axle	3.0 m
Tandem Axle to Tandem Axle	5.0 m
Dimension A	Not controlled


## 2 C-Train Double Section 2 Weight Limits

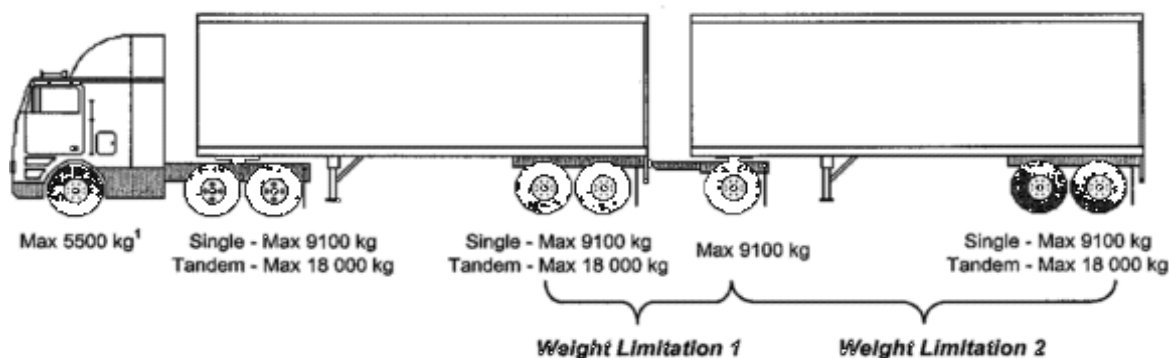



Weight Limits- C Train Double			
Axle Weight Limits			
Axle Group	Axle spread	Weight Limit (Maximum)	
Steering Axle	N/A	5 500 kg	
Single Axle	N/A	9 100 kg	
Tandem Axle (including tandem equivalent axle)			
	1.2 m to 1.85 m	18 000 kg	
Other Weight Limitations			
Limitation	axes	maximum	
sum of lead semi-trailer axle weights plus converter dolly axle weights, if Dimension A is < 3 m	2 axle group	18 000 kg	
	3 axle group	24 000 kg	
sum of second semi-trailer or full trailer axle weights	must not exceed the weight of the truck- tractor drive axle(s) plus the weight of the axle(s) on the first semi-trailer		
GVW Limits (Maximum)			
Axles	Class of Highway		
	Maximum Weight and B-train roads	Intermediate Weight	All other
5 axles	41 900 kg	41 900 kg	41 500 kg
6 axles	50 800 kg	49 500 kg	41 500 kg
7 axles	55 600 kg	49 500 kg	41 500 kg
8 axles	58 500 kg	49 500 kg	41 500 kg

# Category 5: Straight Truck

## 1 Straight Truck Dimension Limits

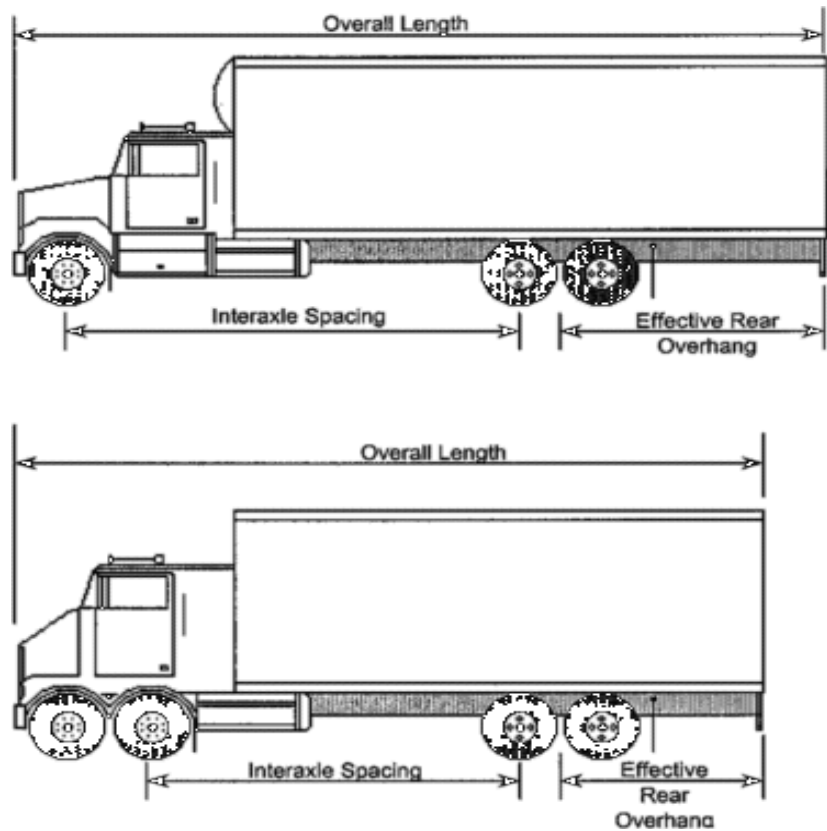

Dimension Limits- Straight Truck	
Dimension	Limit
Overall Length	Maximum 12.5 m
Overall Width	Maximum 2.6 m
Overall Height	Maximum 4.15 m
Box Length	Not controlled
Wheelbase	Not controlled
Tandem axle spread	Minimum 1.2 m/ Maximum 1.85 m
Tandem Steering Axle Spread	Minimum 1.2 m/Maximum 2.2 m
Effective rear overhang	Maximum 4.0 m
Interaxle Spacing	
Dimension	Minimum
Single Axle to Single or Tandem Axle	3.0 m
Tandem Steering Axle to Tandem Axle	3.65 m

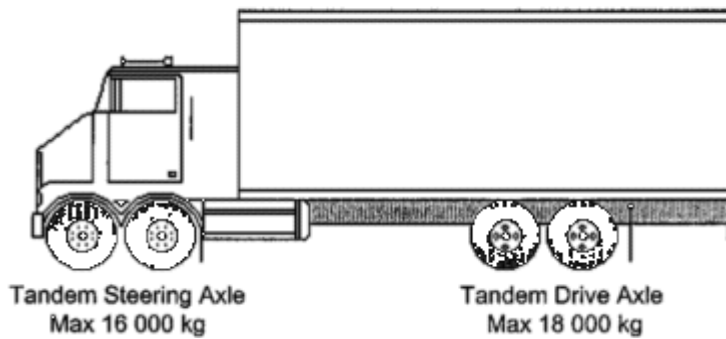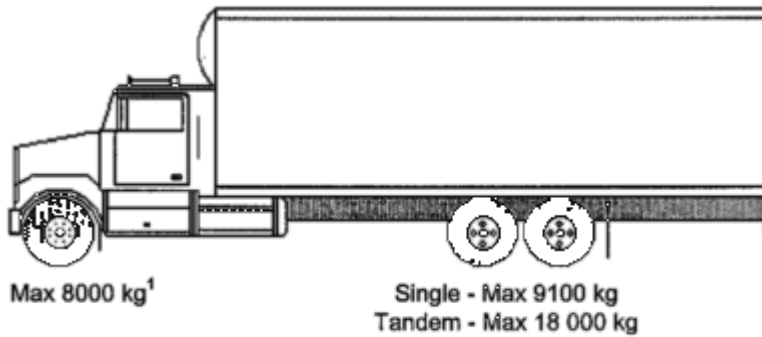

### Weight Limits- Straight Truck

#### Axle Weight Limits


Axle Group	Axle spread	Weight Limit (Maximum)
<b>Steering Axle</b>		
single axle, single tires	N/A	8 000 kg
tandem axle, single tires	N/A	16 000 kg
<b>Single Axle</b>		
	N/A	9 100 kg
<b>Tandem Axle (including tandem equivalent axle)</b>		
	1.2 m to 1.85 m	18 000 kg

#### GVW Limits (Maximum)

Axles	Class of Highway		
	Maximum weight and B-train roads	Intermediate Weight	All other
2 axles	17 100 kg	17 100 kg	17 100 kg
3 axles	26 000 kg	26 000 kg	26 000 kg
4 axles	34 000 kg	34 000 kg	34 000 kg
4 axles -if truck tandem steering axle does not meet minimum interaxle spacing of 3.65 m	reduced under Section 29	reduced under section 29	reduced under Section 29

## Category 6: Truck-Pony Trailer

### 1 Truck-Pony Trailer Dimension Limits

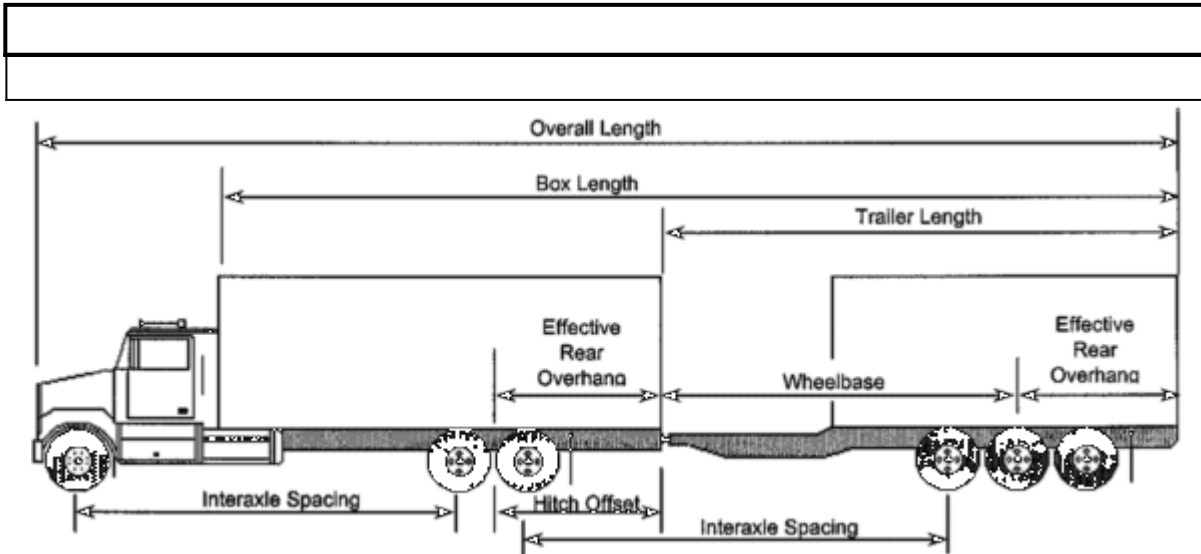

### Dimension Limits- Truck-Pony Trailer

#### Vehicle Combination

Dimension	Maximum
Overall Length	23 m
Overall Width	2.6 m
Overall Height	4.15 m

#### Box

Dimension	Maximum
Length	20 m

#### Truck


Dimension	Limit
Length	Maximum 12.5 m
Wheelbase	Not controlled
Tandem axle spread	Minimum 1.2 m/ Maximum 1.85 m
Effective rear overhang	Maximum 4.0 m
Hitch offset, if pony trailer has GVWR $\geq 10\,000$ kg	Maximum 1.8 m

#### Pony Trailer (only if GVWR $\geq 10\,000$ kg)

Dimension	Limit
Length	Maximum 12.5 m
Wheelbase	Minimum 6.25 m
Wheelbase for 2 or 3 pony trailer model year 2002 or earlier	< 6.25 m, as set out in Schedule A-2
Tandem axle spread	Minimum 1.2 m/Maximum 1.85 m
Tridem axle spread	Minimum 2.4 m/Maximum 3.7 m
Track width	Minimum 2.5 m/Maximum 2.6 m
Effective rear overhang	Maximum 4.0 m

Interaxle Spacing	
Dimension	Minimum
Single Axle to Single, Tandem, or Tridem Axle	3.0 m
Tandem Axle to Tandem Axle	5.0 m
Tandem Axle to Tridem Axle	5.5 m


## 2 Truck-Pony Trailer Weight Limits

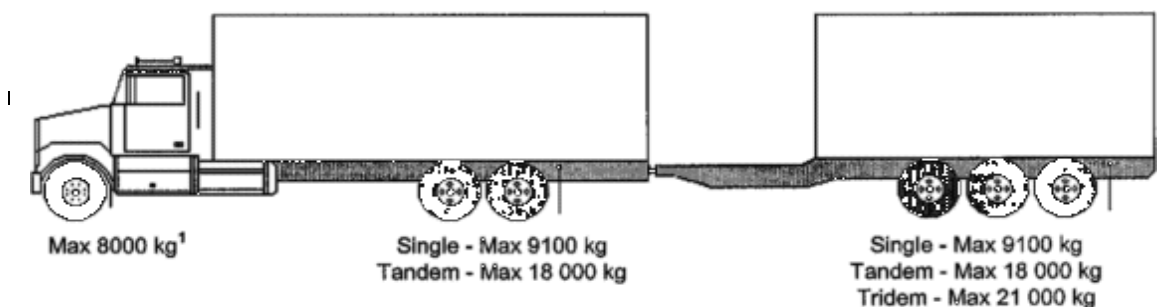

Weight Limits- Truck- Pony Trailer				
Axle Weight Limits				
Axle Group		Axle spread		Weight Limit (Maximum)
Steering Axle		N/A		8 000 kg
Single Axle		N/A		9 100 kg
Tandem Axle (including tandem equivalent axle)				
		1.2 m to 1.85 m		18 000 kg
for 2 or 3 pony trailer model year 2002 or earlier with a wheelbase < 6.25 m				as set out in Schedule A-2
Tridem Axle				
		2.4 m to 3.7 m		21 000 kg
for 2 or 3 pony trailer model year 2002 or earlier with a wheelbase < 6.25 m				as set out in Schedule A-2
GVW Limits (Maximum)				
Axles		Class of Highway		
	Maximum Weight	B-train roads	Intermediate Weight	All other
3 axles	26 200 kg	26 200 kg	26 200 kg	26 200 kg
4 axles	35 100 kg	35 100 kg	35 100 kg	35 100 kg
5 axles	44 000 kg	44 000 kg	44 000 kg	41 500 kg
6 axles	47 000 kg	47 000 kg	47 000 kg	41 500 kg

## Category 7: Tandem Steering Axle Truck-Pony Trailer

### Tandem Steering Axle Truck-Pony Trailer Dimension Limits

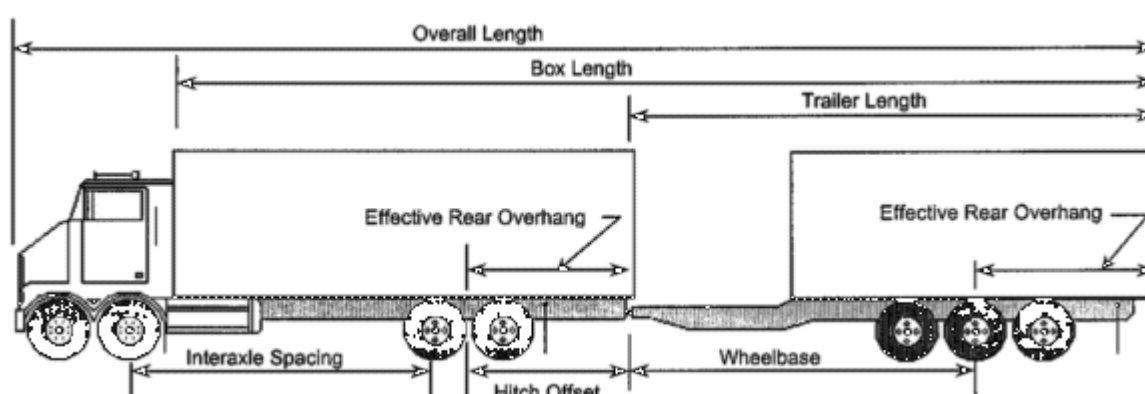

#### Dimension Limits- Tandem Steering Axle Truck-Pony Trailer

##### Vehicle Combination

Dimension	Maximum
Overall Length	23 m
Overall Width	2.6 m
Overall Height	4.15 m

##### Box

Dimension	Maximum
Length	20 m

##### Truck

Dimension	Limit
Length	Maximum 12.5 m
Wheelbase	Not controlled
Tandem steering axle spread	Minimum 1.2 m/ Maximum 2.2 m
Tandem drive axle spread	Minimum 1.2 m/Maximum 1.85 m
Effective rear overhang	Maximum 4.0 m
Hitch offset, if pony trailer has GVWR $\geq 10\,000$ kg	Maximum 1.8 m

##### Pony Trailer (only if GVWR = or > 10 000 kg)


Dimension	Limit
Length	Maximum 12.5
Wheelbase	Minimum 6.25 m
Wheelbase for 2 or 3 pony trailer model year 2002 or earlier	< 6.25 m, as set out in Schedule A-2
Tandem axle spread	Minimum 1.2 m/Maximum 185 mm
Tridem axle spread	Minimum 2.4 m/Maximum 3.7 m
Track width	Minimum 2.5 m/Maximum 2.6 m
Effective rear overhang	Maximum 4.0 m

##### Interaxle Spacing

Dimension	Minimum
Tandem Steering Axle to Tandem Drive Axle	3.65 m
Single Axle to Single, Tandem, or Tridem Axle	3.0 m
Tandem Axle to Tandem Axle	5.0 m
Tandem Axle to Tridem Axle	5.5 m



### Tandem Steering Axle Truck-Pony Trailer Weight Limits

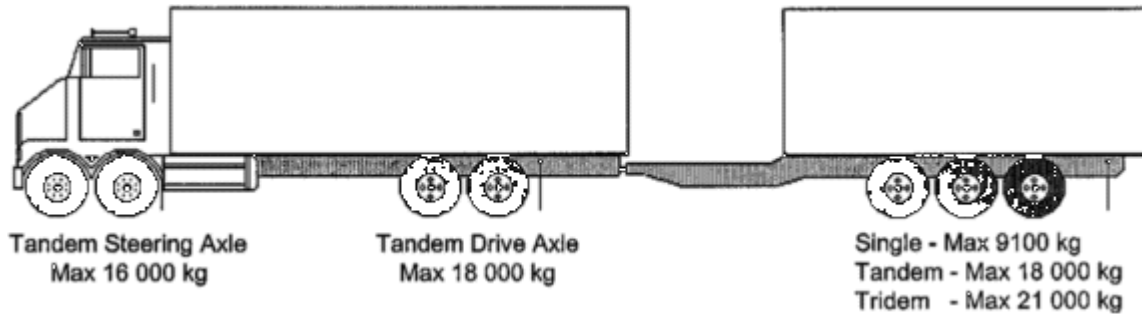

#### Weight Limits- Tandem Steering Axle Truck- Pony Trailer

##### Axle Weight Limits

Axle Group	Axle spread	Weight Limit (Maximum)
Truck Tandem Steering Axle	1.2 m to 2.2 m	16 000 kg
Truck Tandem Drive Axle	1.2 m to 1.85 m	18 000 kg
Trailer Single Axle	N/A	9 100 kg
Trailer Tandem Axle	1.2 m to 1.85 m	18 000 kg
Trailer Tridem Axle	2.4 m to 3.7 m	
for 2 or 3 pony trailer model year 2002 or earlier with a wheelbase <6.25 m		as set out in Schedule A-2
Tridem Axle		
	2.4 m to 3.7 m	21 000 kg
for 2 or 3 pony trailer model year 2002 or earlier with a wheelbase < 6.25 m		as set out in Schedule A-2


##### GVW Limits (Maximum)

Axles	Class of Highway		
	Maximum Weight and B - train roads	Intermediate Weight	All other
5 axles	43 100 kg	43 100 kg	41 500 kg
6 axles	50 000 kg	49 500 kg	41 500 kg
7 axles	53 500 kg	49 500 kg	41 500 kg
if truck tandem steering axle does not meet minimum interaxle spacing of 3.65 m	Reduced under s. 29	Reduced under s. 29	Reduced under s. 29

## Category 8: Truck-Full Trailer

1

### Truck-Full Trailer Dimension Limits

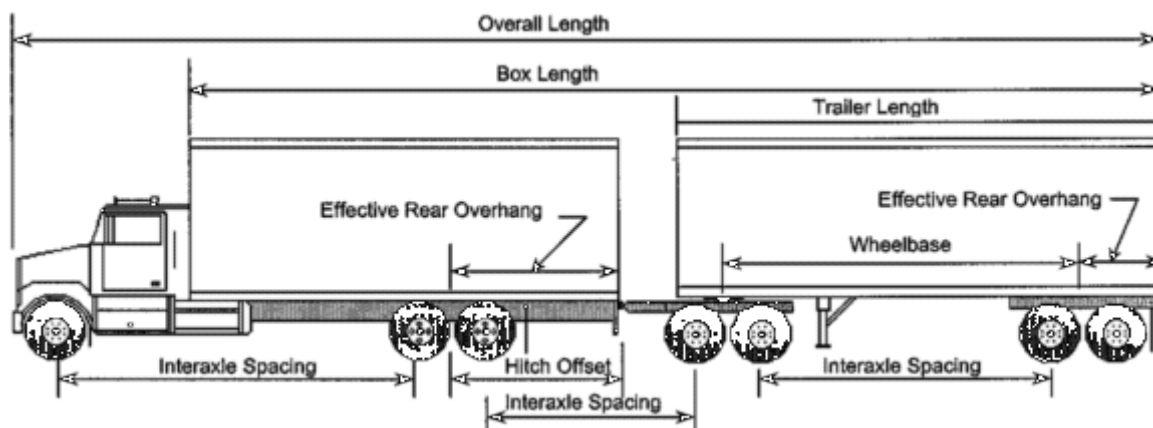

### Dimension Limits- Truck-Full Trailer

#### Vehicle Combination

Dimension	Maximum
Overall Length	23 m
Overall Width	2.6 m
Overall Height	4.15 m

#### Box

Dimension	Maximum
Length	20 m

#### Truck

Dimension	Limit
Length	Maximum 12.5 m
Wheelbase	Not controlled
Tandem axle spread	Minimum 1.2 m/ Maximum 1.85 m
Effective rear overhang	Maximum 4.0 m
Hitch offset	Maximum 1.8 m

#### Full Trailer

Dimension	Limit
Length	Maximum 12.5 m
Wheelbase	Minimum 6.25 m
Tandem axle spread	Minimum 1.2 m/Maximum 1.85 m
Tridem axle spread	Minimum 2.4 m/Maximum 3.7 m
Track width	Minimum 2.5 m/Maximum 2.6 m
Effective rear overhang	Maximum 35% of wheelbase


#### Converter Dolly

Dimension	Limit
double drawbar or C Dolly	Not permitted

#### Interaxle Spacing

Dimension	Minimum
Single Axle to Single or Tandem Axle	3.0 m
Tandem Axle to Tandem Axle	5.0 m

## Truck-Full Trailer Weight Limits

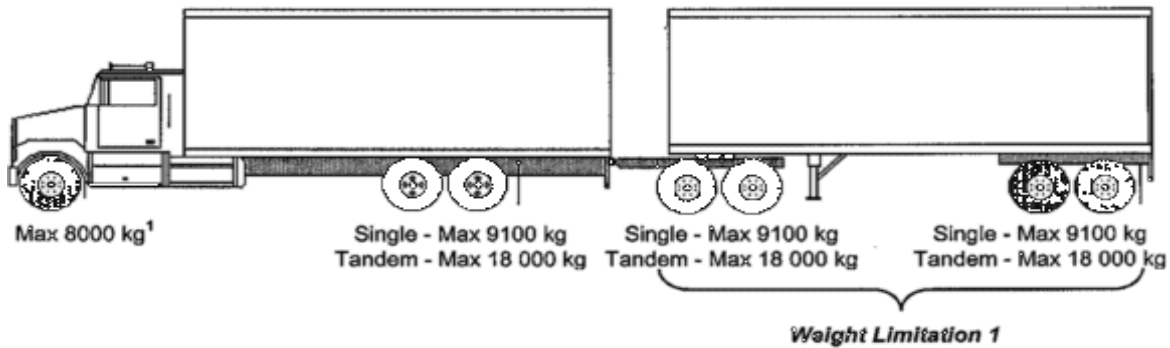

### Weight Limits- Truck- Full Trailer

#### Axle Weight Limits


Axle Group	Axle spread	Weight Limit (Maximum)
Steering Axle	N/A	8 000 kg
Single Axle	N/A	9 100 kg
Tandem Axle (including tandem equivalent axle)		
	1.2 m to 1.85 m	18 000 kg
Weight Limitation -sum of full trailer axle weights		
4 axle truck-trailer combination	N/A	Maximum 17 000 kg
5 axle truck-trailer combination		Maximum 17 000 kg
6 axle truck-trailer combination		Maximum 24 000 kg
7 axle truck-trailer combination		Maximum 31 000 kg

#### GVW Limits (Maximum)

Axles	Class of Highway		
	Maximum Weight and B-train roads	Intermediate Weight	All other
4 axles	34 100 kg	34 100 kg	34 100 kg
5 axles	43 000 kg	43 000 kg	41 500 kg
6 axles	50 000 kg	49 500 kg	41 500 kg
7 axles	53 500 kg	49 500 kg	41 500 kg

## Category 9: Tandem Steering Axle Truck- Full Trailer

### 1 Tandem Steering Axle Truck- Full Trailer Dimension Limits

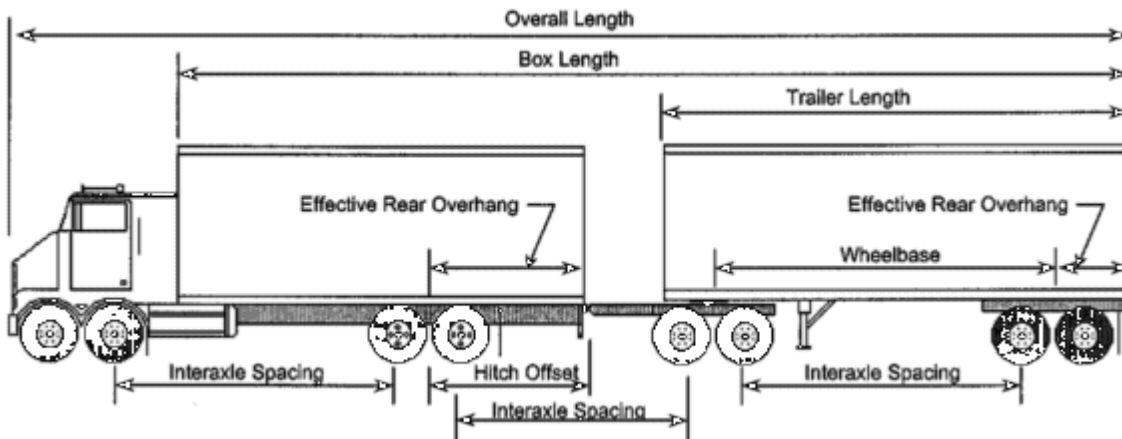

#### Dimension Limits- Tandem Steering Axle Truck-Full Trailer

##### Vehicle Combination

Dimension	Maximum
Overall Length	23 m
Overall Width	2.6 m
Overall Height	4.15 m

##### Box

Dimension	Maximum
Length	20 m

##### Truck

Dimension	Limit
Length	Maximum 12.5 m
Wheelbase	Not controlled
Tandem steering axle spread	Minimum 1.2 m/Maximum 2.2 m
Tandem drive axle spread	Minimum 1.2 m/Maximum 1.85 m
Effective rear overhang	Maximum 4.0 m
Hitch offset	Maximum 1.8 m

##### Full Trailer

Dimension	Limit
Length	Maximum 12.5 m
Wheelbase	Minimum 6.25 m
Tandem axle spread	Minimum 1.2 m/Maximum 1.85 m
Track width	Minimum 2.5 m/Maximum 2.6 m
Effective rear overhang	Maximum 35% of wheelbase


##### Converter Dolly

Dimension	Limit
double drawbar or C Dolly	Not permitted

##### Interaxle Spacing

Dimension	Minimum
Tandem Steering Axle to Tandem Drive Axle	3.65 m
Single Axle to Single or Tandem Axle	3.0 m
Tandem Axle to Tandem Axle	5.0 m

## Tandem Steering Axle Truck- Full Trailer Weight Limits

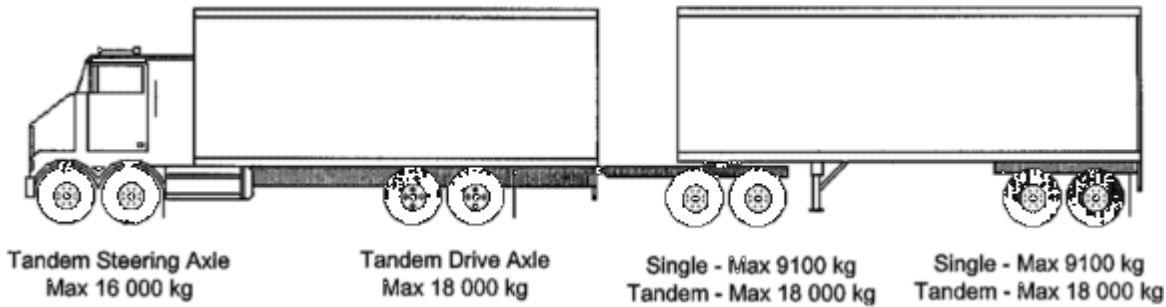

### Weight Limits- Tandem Steering Axle Truck- Full Trailer

#### Axle Weight Limits


Axle Group	Axle spread	Weight Limit (Maximum)
Tandem Steering Axle	N/A	16 000 kg
Single Axle	N/A	9 100 kg
<b>Tandem Axle (including tandem equivalent axle)</b>		
	1.2 m to 1.85 m	18 000 kg

#### GVW Limits (Maximum)

Axles	Class of Highway		
	Maximum Weight and B-train roads	Intermediate Weight	All other
6 axles	51 000 kg	49 500 kg	41 500 kg
7 axles	53 500 kg	49 500 kg	41 500 kg
8 axles	53 500 kg	49 500 kg	41 500 kg
if truck tandem steering axle does not meet minimum interaxle spacing of 3.65 m	Reduced under s.29	Reduced under s.29	Reduced under s.29


Category 10: Bus or Class “A” Recreational Vehicle

1 Bus or Class “A” Recreational Vehicle Dimension Limits

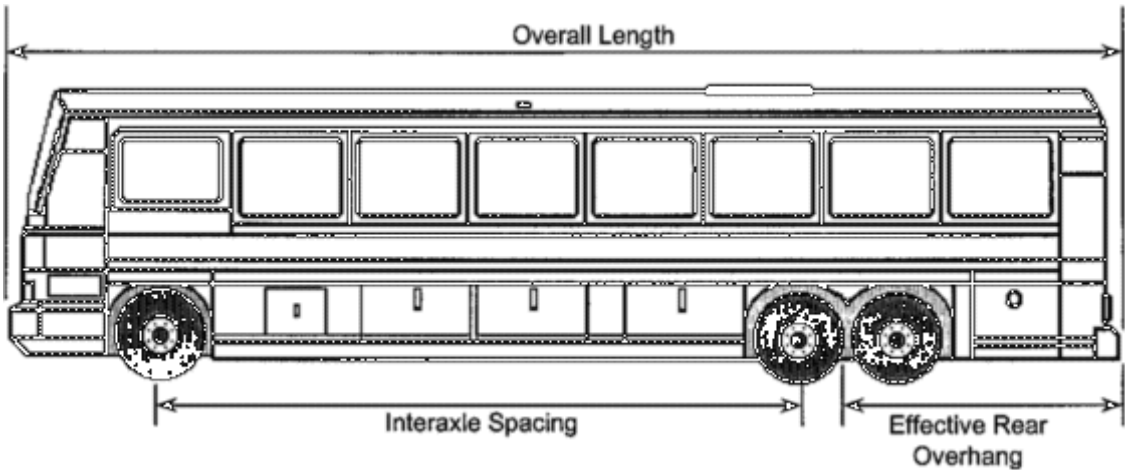

Dimension Limits- Bus or Class “A” RV	
Dimension	Limit
Overall Length	Maximum 14.0 m
Overall Width	Maximum 2.6 m
Overall Height	Maximum 4.15 m
Wheelbase	Not controlled
Tandem axle spread	Minimum 1.2 m/ Maximum 1.85 m
Effective rear overhang	Maximum 4.0 m
Axle Requirements	
Dimension	Limit
If overall length 12.5 m or less	Not controlled
If overall length > 12.5 m	Minimum 3 axles

## 2 Bus or Class “A” Recreational Vehicle Weight Limits

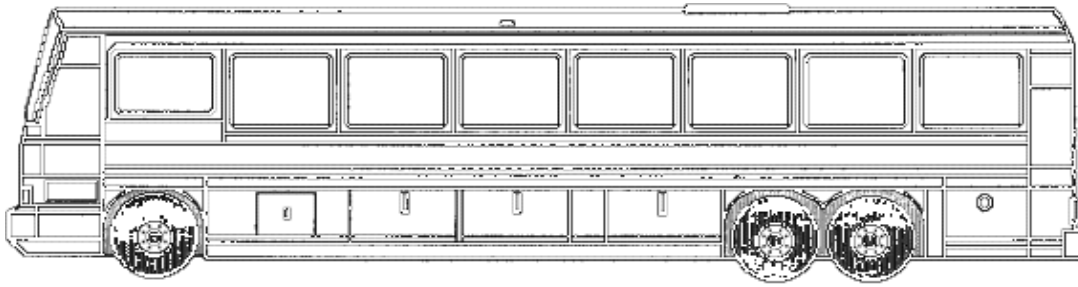

Max 7250 kg<sup>1</sup>

Single Axle (single tires) - Max 6000 kg

Single Axle (dual tires) - Max 9100 kg

Tandem Axle - Max 18 000 kg

### Weight Limits- Bus or Class “A” RV

#### Axle Weight Limits

Axle Group	Weight Limit (Maximum)
Steering axle	7 250 kg
Single axle (dual tires)	9 100 kg
Single Axle (single tires)	6 000 kg
Tandem Axle (dual tires on both axles)	18 000 kg


#### GVW Limits (Maximum)

Axles	Class of Highway		
	Maximum weight and B- train roads	Intermediate Weight	All other
2 axles (4 tires)	13 250 kg	13 250 kg	13 250 kg
2 axles (6 tires)	16 350 kg	16 350 kg	16 350 kg
3 axles (8 tires)	20 900 kg	20 900 kg	20 900 kg
3 axles (10 tires)	25 250 kg	25 250 kg	25 250 kg

## Category 10 A: Bus or Class “A” Recreational Trailer with Pony Trailer

1

### Bus or Class “A” Recreational Vehicle with Pony Trailer Dimension Limits

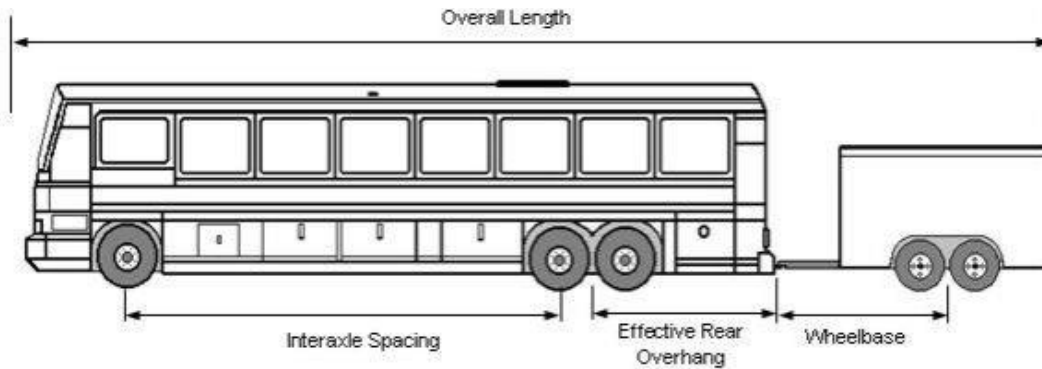

#### Dimension Limits- Bus or Class “A” RV with Pony Trailer

##### Vehicle Combination

Dimension	Maximum
Overall Length	20 m
Overall Width	2.6 m
Overall Height	4.15 m

##### Bus or Class “A” RV

Dimension	Limit
Length	Maximum 14.0 m
Wheelbase	Not controlled
Tandem axle spread	Minimum 1.2 m/ Maximum 1.85 m
Effective rear overhang	Maximum 4.0 m

##### Axle Requirements: bus or RV

Dimension	Limit
If overall length 12.5 m or less	Not controlled
If overall length greater than 12.5 m	Minimum 3 axles


##### Pony Trailer

Dimension	Limit
Wheelbase	Minimum 3.84 m



2


Bus or Class “A” Recreational Vehicle with Pony Trailer Weight Limits

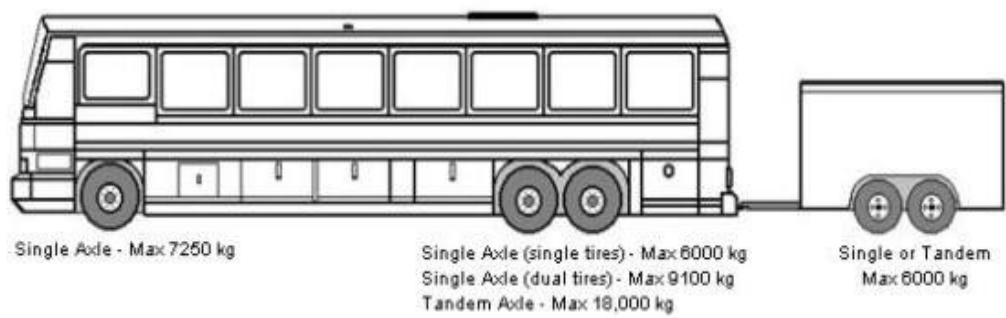

Weight Limits- Bus or Class “A” RV with Pony Trailer			
Axle Weight Limits			
Axle Group		Weight Limit (Maximum)	
Bus or RV axles			
Steering axle		7 250 kg	
Single axle (dual tires)		9 100 kg	
Single Axle (single tires)		6 000 kg	
Tandem Axle (dual tires on both axles)		18 000 kg	
Trailer Axles			
Single or tandem axles, 2 or 4 tires on each axle		6 000 kg	
GVW Limits (Maximum)			
Axles	Class of Highway		
	Maximum weight and B-train roads	Intermediate Weight	All other
2 bus axles (4 tires) + pony trailer	19 250 kg	19 250 kg	19 250 kg
2 bus axles (6 tires) + pony trailer	22 350 kg	22 350 kg	22 350 kg
3 bus axles (8 tires) + pony trailer	26 900 kg	26 900 kg	26 900 kg
3 bus axles (10 tires) + pony trailer	31 250 kg	31 250 kg	31 250 kg

## Category 11: Stinger Steer Carrier

### 1 Stinger Steer Carrier Dimension Limits

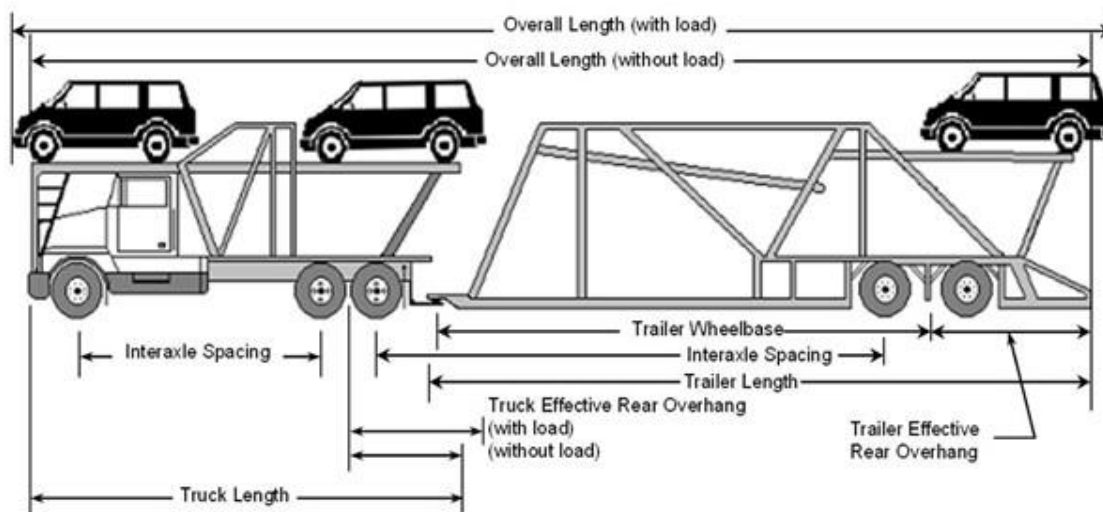

#### Dimension Limits- Stinger Steer Carrier

##### Vehicle Combination

Dimension	Maximum
Overall Length (without load)	23 m
Overall Length (with load)	25 m
Overall Width	2.6 m
Overall Width (if load overhangs front or rear)	2.1 m
Overall Height (without load)	4.15 m
Overall Height (with load) (subject to s.20 requirements)	4.3 m

##### Truck

Dimension	Limit
Overall Length	Maximum 12.5 m
Tandem axle spread	Minimum 1.2 m/ Maximum 1.85 m
Load overhang at front (beyond bumper)	Maximum 1.0 m
Effective rear overhang (without load)	Maximum 4.0 m
Effective rear overhang (with load)	Maximum 4.6 m


##### Trailer

Dimension	Limit
Length	Maximum 14.65 m
Wheelbase	Minimum 6.25 m/ Maximum 12.5 m
Effective rear overhang	Maximum the greater of 4.0 m or 42% of wheelbase
Load overhang at rear	Maximum 1.2 m
Track width	Maximum 2.6 m

##### Interaxle Spacing

Dimension	Minimum
Single Axle to Single or Tandem Axle	3.0 m
Tandem Axle to Tandem Axle	5.0 m


2                      **Stinger Steer Carrier Weight Limits**

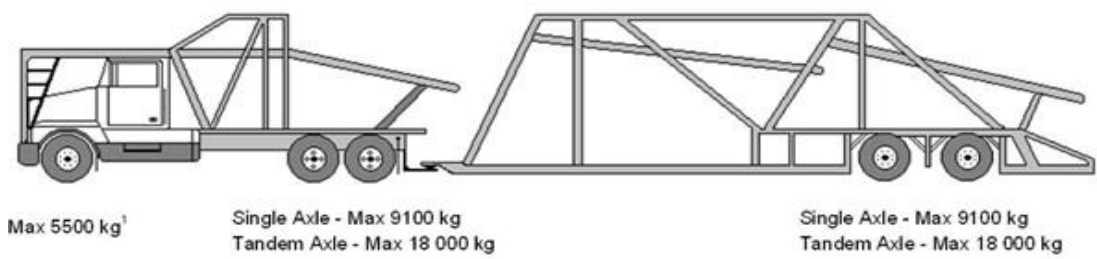

Weight Limits- Stinger Steer Carrier			
Axle Weight Limits			
Axle Group		Axle Spread	Weight Limit (Maximum)
Steering axle		N/A	5 550 kg
Single axle		N/A	9 100 kg
Tandem Axle (including tandem equivalent axle)		1.2 m to 1.85 m	18 000 kg
GVW Limits (Maximum)			
Axles	Class of Highway		
	Maximum weight and B-train roads	Intermediate Weight	All other
3 axles	23 700 kg	23 700 kg	23 700 kg
4 axles	32 600 kg	32 600 kg	32 600 kg
5 axles	41 500 kg	41 500 kg	41 500 kg

## Category 12: Truck-Tractor Self-Steering Quad Axle Semi-Trailer

### Truck-Tractor Self-Steering Quad Axle Semi-Trailer Dimension Limits

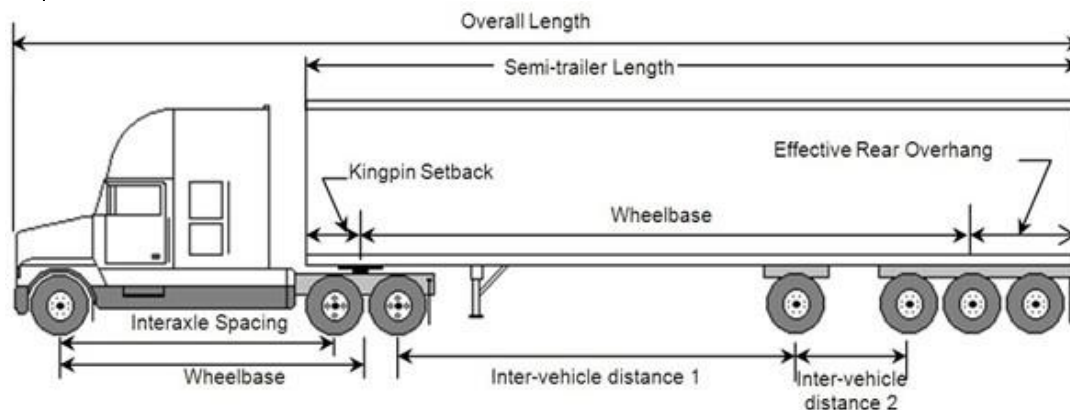

#### Dimension Limits- Truck-tractor Self-Steering Quad Axle Semi-trailer

##### Vehicle Combination

Dimension	Maximum
Overall Length	23 m
Overall Width	2.6 m
Overall Height	4.15 m

##### Truck-Tractor

Dimension	Limit
Wheelbase	Maximum 6.2 m
Tandem axle spread	Minimum 1.2 m/ Maximum 1.85 m

##### Semi-trailer

Dimension	Limit
Length	Maximum 16.2 m
Wheelbase	Maximum 12.5 m
Kingpin setback	Maximum 2.0 m radius
Effective rear overhang	Maximum 35% of wheelbase
Tridem axle spread	Minimum 3.0 m/Maximum 3.7 m
Track width	Minimum 2.5 m/Maximum 2.6 m


##### Inter-vehicle distance

Dimension	Limit
<b>Inter-vehicle distance 1</b> tridem axle spread 3.0 m to 3.7 m tridem spread 3.6 m to 3.7 m	Minimum 6.0 m Minimum 5.5 m
<b>Inter-vehicle distance 2</b>	Minimum > 2.5 m/Maximum 3.0 m

##### Interaxle Spacing

Dimension	Minimum
Steering axle to Tandem Axle	3.0 m

## Truck-Tractor Self-Steering Quad Axle Semi-Trailer Weight Limits

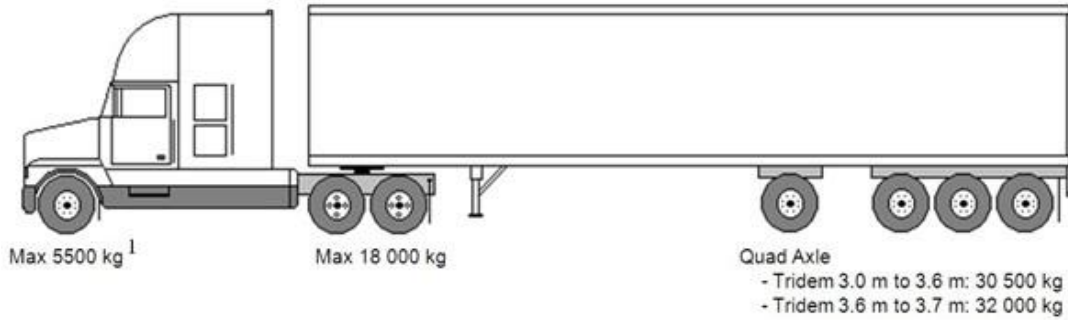

Weight Limits- Truck-tractor Self-Steering Quad Axle Semi-trailer				
Axle Weight Limits				
Axle Group	Axle spread		Weight Limit (Maximum)	
Steering Axle	N/A		5 500 kg	
Self-steering Axle	N/A		8 000 kg	
Tandem Axle (including tandem equivalent axle)				
	1.2 m to 1.85 m		18 000 kg	
Self-steering quad axle				
Quad axle			26 000 kg on intermediate weight highways	
Quad axle			18 000 kg on all other highways	
Tridem axle spread	3.0 m to < 3.6 m		30 500 kg	
Tridem axle spread	3.6 m to 3.7 m		32 000 kg	
GVW Limits (Maximum)				
Axles and axle spread	Class of Highway			
	Maximum Weight	B train road	Intermediate Weight	All other
7 axles with tridem axle spread 3.0 m to < 3.6 m	54 000 kg	54 000 kg	49 500 kg	41 500 kg
7 axles with tridem axle spread 3.6 to 3.7 m	55 500 kg	55 500 kg	49 500 kg	41 500 kg

## Schedule A-1: Maximum Semi-trailer Wheelbases

Truck-Tractor Wheelbase	Maximum Semi-trailer Wheelbase
$\leq 6.2$ m	12.50 m
$> 6.2$ m to 6.3 m	12.47 m
$> 6.3$ m to 6.4 m	12.40 m
$> 6.4$ m to 6.5 m	12.33 m
$> 6.5$ m to 6.6 m	12.27 m
$> 6.6$ m to 6.7 m	12.20 m
$> 6.7$ m to 6.8 m	12.13 m
$> 6.8$ m to 6.9 m	12.07 m
$> 6.9$ m to 7.0 m	12.00 m
$> 7.0$ m to 7.1 m	11.93 m
$> 7.1$ m to 7.2 m	11.87 m

## Schedule A-2: Pony Trailer Axle Weight Limits for Pony Trailers Model Year 2002 and Earlier

Wheelbase	Maximum Axle Weight	
	2-axle	3-axle
$\geq 6.25$ m	18 000 kg	21 000 kg
5.75 m - 6.24 m	17 000 kg	20 000 kg
5.25 m - 5.74 m	16 000 kg	19 000 kg
4.75 m - 5.24 m	15 000 kg	17 750 kg
4.25 m - 4.74 m	14 000 kg	16 500 kg
3.75 m - 4.24 m	13 000 kg	15 000 kg
3.25 m - 3.74 m	12 000 kg	13 500 kg

## Schedule A-3: Semi-trailer Axle Weight Limits for Semi-trailers Model Year 2002 and Earlier

Semi-trailer maximum axle weights						
Maximum Weight Roads						
Wheelbase	Single Axles	Tandem Axles	Tridem & Triaxle Axles		Tridem Axles	Triaxle Axles
			Axle spread: 2.4m to <3.0 m	Axle spread: 3.0m to <3.6 m	Axle spread ≥ 3.6m	Axle spread: 3.6 m to 4.9 m
≥ 6.25 m	9 100 kg	18 000 kg	21 000 kg	24 000 kg	26 000 kg	26 000 kg
5.75 m - 6.24 m	8 100 kg	17 000 kg	20 000 kg	23 000 kg	25 000 kg	25 000 kg
5.25 m - 5.74 m	7 100 kg	16 000 kg	19 000 kg	22 000 kg	24 000 kg	24 000 kg
4.75 m - 5.24 m	6 100 kg	15 000 kg	18 000 kg	21 000 kg	23 000 kg	23 000 kg
4.25 m - 4.74 m	5 100 kg	14 000 kg	17 000 kg	20 000 kg	22 000 kg	22 000 kg
3.75 m - 4.24 m	4 100 kg	13 000 kg	16 000 kg	19 000 kg	21 000 kg	21 000 kg
Intermediate Weight Roads and B-Train Routes						
Wheelbase	Single Axles	Tandem Axles	Tridem & Triaxle Axles		Tridem Axles	Triaxle Axles
			Axle spread: 2.4m to <3.0 m	Axle spread: 3.0m to <3.6 m	Axle spread ≥ 3.6m	Axle spread: 3.6 m to 4.9 m
≥ 6.25 m	9 100 kg	18 000 kg	21 000 kg	24 000 kg	24 000 kg	24 000 kg
5.75 m - 6.24 m	8 100 kg	17 000 kg	20 000 kg	23 000 kg	24 000 kg	24 000 kg
5.25 m - 5.74 m	7 100 kg	16 000 kg	19 000 kg	22 000 kg	24 000 kg	24 000 kg
4.75 m - 5.24 m	6 100 kg	15 000 kg	18 000 kg	21 000 kg	23 000 kg	23 000 kg
4.25 m - 4.74 m	5 100 kg	14 000 kg	17 000 kg	20 000 kg	22 000 kg	22 000 kg
3.75 m - 4.24 m	4 100 kg	13 000 kg	16 000 kg	19 000 kg	21 000 kg	21 000 kg
All Other Highways						
Wheelbase	Single Axles	Tandem Axles	Tridem & Triaxle Axles		Tridem Axles	Triaxle Axles
			Axle spread: 2.4m to <3.0 m	Axle spread: 3.0m to <3.6 m	Axle spread ≥ 3.6m	Axle spread: 3.6 m to 4.9 m
≥ 6.25 m	9 100 kg	18 000 kg	18 000 kg	18 000 kg	18 000 kg	18 000 kg
5.75 m - 6.24 m	8 100 kg	17 000 kg	18 000 kg	18 000 kg	18 000 kg	18 000 kg
5.25 m - 5.74 m	7 100 kg	16 000 kg	18 000 kg	18 000 kg	18 000 kg	18 000 kg
4.75 m - 5.24 m	6 100 kg	15 000 kg	18 000 kg	18 000 kg	18 000 kg	18 000 kg
4.25 m - 4.74 m	5 100 kg	14 000 kg	17 000 kg	18 000 kg	18 000 kg	18 000 kg
3.75 m - 4.24 m	4 100 kg	13 000 kg	16 000 kg	18 000 kg	18 000 kg	18 000 kg