N. Westerly Line N.5½° E 1800 ft. on the Lode.

Creampot Mine.

Scale 100 ft to the inch.

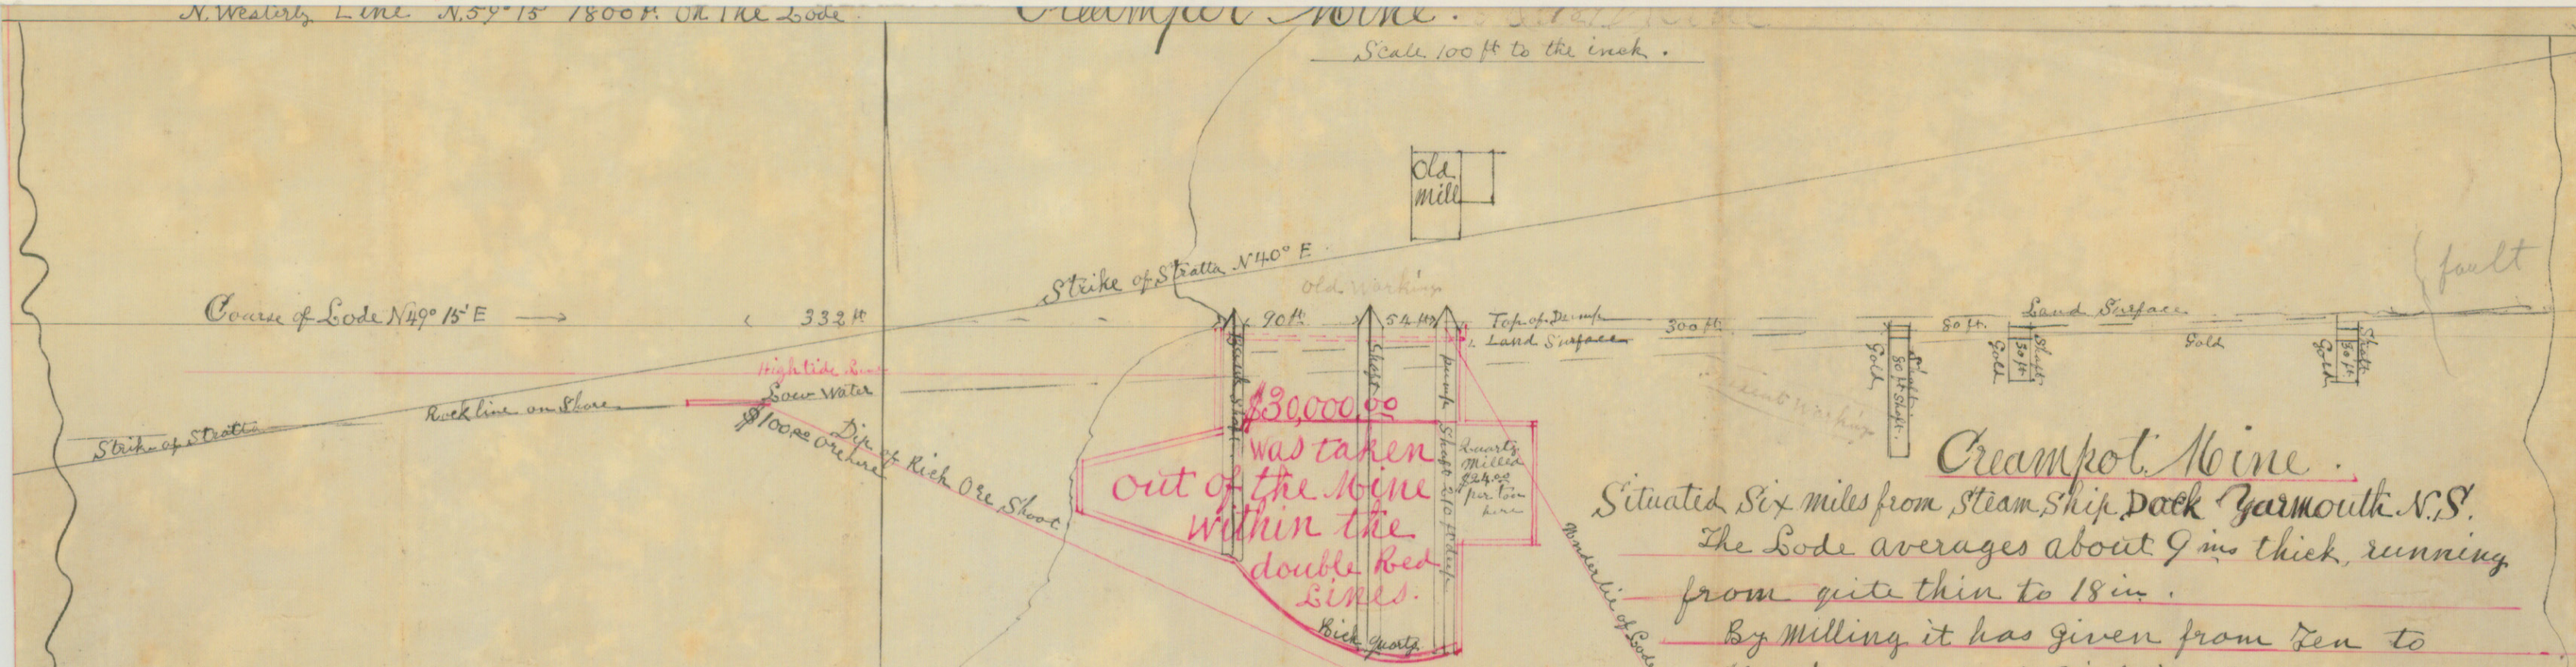

An amalgamation test of Quarts from Low water, and bottom of the Mine Gave 83⅓ pennyweights per ton, Concentrates of same gove 211 pennyweights per ton. By fire assay of same from 60 to 102 pennyweights was recovered.

Creampot Gold Mine.

Cranberry Head Yarmouth N.S.

Southerly Line 1800 ft. on the Lode by 750 ft. across the Metals.

Creampot Mine.

Situated Six miles from Steam Ship Dock Yarmouth N.S.

The Lode averages about 9 ins thick, running from quite thin to 18 in.

By Milling it has given from Ten to $60 per ton, and Yielding Concentrates averaging $124 per ton of Concentrates.

The mine is in good repair below the perminant water Line.

The working belt is soft drills easy and shoots well

It is expected to strike other Gold Bearing Lodes in the property.